


Zoe

Slim downlight

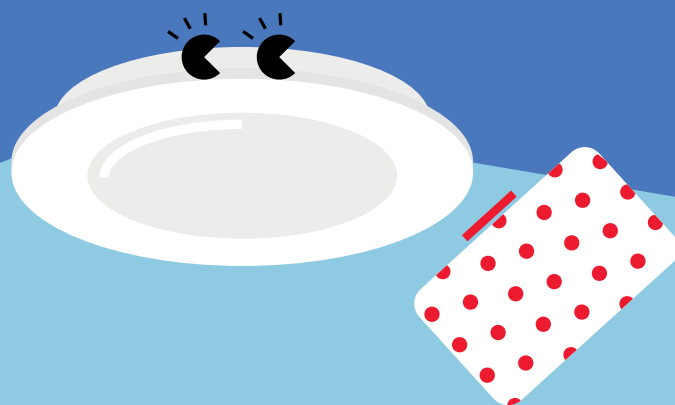

Meet Zoe

Slim and adaptable,
Zoe is perfectly suited
to everyday needs

- Uniform light surface
- Product height of only 12mm: fits various ceiling types
- Choice of 3000 K or 4000 K to suit application use
- Replaces conventional downlights with 1x18 W, 1x26 W and 2x18 W CFL and offers up to 50% energy saving
- Tool-free installation



1500lm

900lm

600lm



Available in
600, 900 and
1500 lumen
versions



Save up to
50% energy
compared
to compact
fluorescent
downlights



110, 160 and
210 mm cut-outs



IP44: splash
resistant

Ideal for...



Corridors



Reception areas






Offices and
meeting rooms



Schools and
universities

Light source information

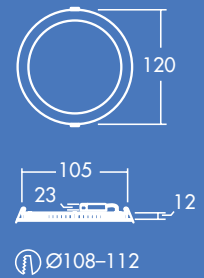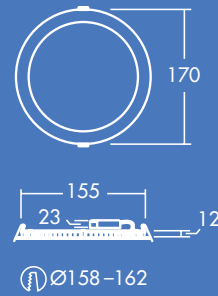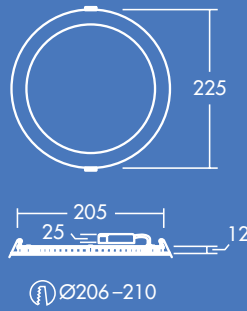

- 600lm (8W), 900lm (12W) and 1500lm (18W), up to 85lm/W
- Color temperatures: 4000K and 3000K
- 25 000 hour rated life (@L70B50, Ta 25°C)
- CRI 80
- McAdam (initial): 5 step




Lighting distribution

Zoe 900lm

cd/klm ULOR: 0% DLOR: 100% LOR: 100%

83lm/W  

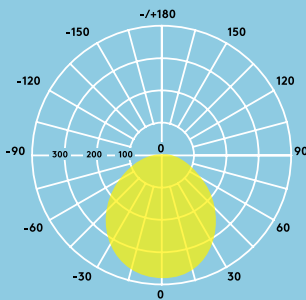

Ordering guide

Description	Wt (Kg)	SAP Code
ZOE LED DL 110 600 840	0.25	96666088
ZOE LED DL 160 900 840	0.40	96666089
ZOE LED DL 210 1500 840	0.55	96666090
ZOE LED DL 110 600 830	0.25	96666092
ZOE LED DL 160 900 830	0.40	96666093
ZOE LED DL 210 1500 830	0.55	96666094
Accessories		
Just Emergency PLUG&PLAY E3 Kit		96628839
Just Emergency PLUG&PLAY Self Test E3 Kit		96628840

830-3000K, 840-4000K

Installation/Mounting

- Recessed installation into a wide range of ceiling types
- Easy installation thanks to an external connector box enabling loop-in loop-out wiring

Material/Finish

Body: Aluminum white finish

Diffuser: Polycarbonate

Specification

- Class II electrical
- IP44
- IK02

