


Eve

Recessed LED panel

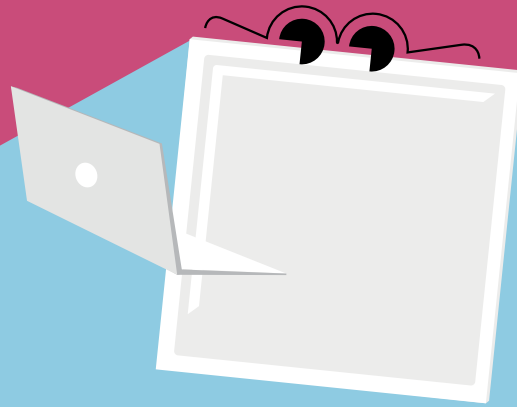

Meet Eve

Low glare and compact,
Eve creates a harmonious
setting in desk space
environments

- Elegant seamless frame made out of one-piece high-quality ABS material
- Compact design with integrated driver for better reliability
- Tool-free installation (piano key terminal for up to 2.5 mm² wires)
- Fully homogeneous illumination
- Easy installation thanks to an external connector box enabling loop-in loop-out wiring
- Replaces conventional luminaires with 4x18W T8 and offers up to 60 % energy saving



3400 lumens
110 lm/W
(4000K)



Save up to
80 % energy
compared with
panels with
fluorescent
lamps



<19 UGR:
gentle, soft
and low
glare lighting
for office
applications



596 x 596 mm



3h emergency
version
available



50 000 hours
lifetime

Ideal for...




Offices and
meeting rooms



Schools and
universities

Light source information

- 4000K, 3400lm (31W) 110lm/W
- 3000K, 3200 lm (31W), 103 lm/W
- 50 000 hour rated life (@L70B50, Ta 25°C)
- CRI 80
- McAdam (initial): 3 step
- Suitable for lighting designs requiring <19 UGR

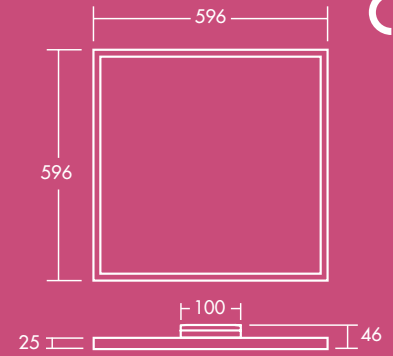

Performance guide

3400 lumens - open plan office

Ceiling height (m)	Luminaire Spacings (m)	Lux Level Average (E_m)	Uniformity (U_o)	UGR
2.4	3.0 x 3.0	336 lux	0.63	19
	3.0 x 2.4	409 lux	0.70	19
	2.4 x 2.4	502 lux	0.80	19
2.7	3.0 x 3.0	326 lux	0.76	19
	3.0 x 2.4	398 lux	0.81	19
	2.4 x 2.4	487 lux	0.89	19
3.0	3.0 x 3.0	318 lux	0.86	19
	3.0 x 2.4	388 lux	0.84	19
	2.4 x 2.4	474 lux	0.89	19

Based on a 13.8 x 13.8 metre open plan office with 70/50/20 reflectances, a 0.80 maintenance factor and 0.8 working plane

Ordering guide

Description	Wt (Kg)	SAP Code	Cat. No.
EVE LED Q596 3400 840	3.3	96666096	EE3400Z4K
EVE LED Q596 3400 830	3.3	96628837	EE3400Z3K
Emergency version			
EVE LED Q596 3400 840 E3	3.9	96628611	EE3400ZE4K
Accessories			
EVE LED Q596 Recessed Mount Box		96628912	
EVE LED Q596 SURFACE MOUNT BOX		96628856	EESUREKIT
Lighting Control			
SWITHLITE MRE SLD MAN		96239823	
SWITHLITE MRE SLDM MR		96239822	
SWITHLITE CC PROGRAMMER		96240295	

Installation/Mounting

- Lay-in installation in T-bar ceiling grids
- Suitable for suspension, surface and recessed installation

Material/Finish

Frame: ABS, white (RAL 9016)
 Diffuser: PS
 Backplate: Aluminium

Specification

- Class II electrical
- IP40
- IK02

