

# Gameo

## Recessed LED panel



### Meet Gameo

Low glare and compact, Gameo creates a harmonious setting in desk space environments

- Recessed/surface/suspended edge lit LED luminaire with a slim 12mm profile
- Fully homogeneous illumination
- Electrical connection via push wire terminal blocks, loop in/loop out possible
- Replaces conventional luminaires with 4x 18W T8 and offers up to 60% energy saving



3400 lumens (4000K) and 3200 lumens (3000K), up to 106 lm/W



Save up to 60% energy compared with panels with fluorescent lamps



<19 UGR: gentle, soft and glare free lighting for office applications



596 x 596 mm and 622 x 622 mm



3h emergency version available



50 000 hours lifetime

### Ideal for...





Offices and meeting rooms



Schools and universities

### Light source information

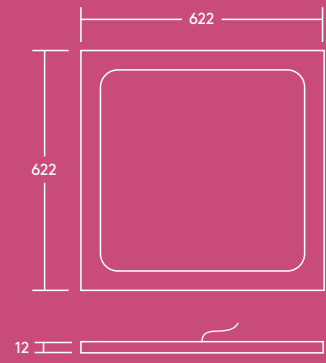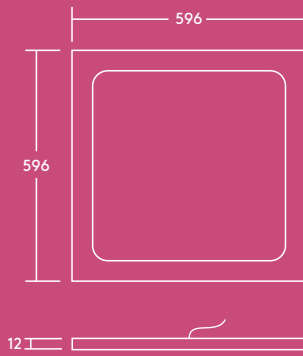

- 3000 K, 3200 lm (32W), 100lm/W
- 4000 K, 3400 lm (32W), 106lm/W
- CRI80
- McAdam (initial): 5 step
- Low glare: <19 UGR




## Lighting distribution

### Gameo 3400lm

cd/klm ULOR: 0% DLOR: 100% LOR: 100%

106lm/W  

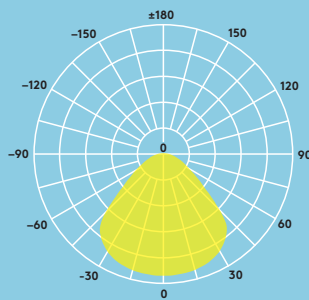

## Ordering guide

Description	Wt (kg)	SAP Code
GAMEO LED Q596 3400 840	4.77	96629783
GAMEO LED Q596 3400 830	4.77	96629812
GAMEO LED Q622 3400 840	4.97	96629814
GAMEO LED Q622 3400 830	4.97	96629813
<b>Emergency version</b>		
GAMEO LED Q596 3400 840 E3	5.73	96629815

### Installation/Mounting

- Lay-in installation in T-bar ceiling grids
- Suitable for suspension, surface and recessed installation

### Material/Finish

Frame: sheet steel white (RAL9016)  
Diffuser: UV-stabilised, prismatic optic

### Specification

- Class II electrical
- IP40 from below
- IP20 from above
- IK03

