


Amy

VARIO FLEX

Recessed LED Downlight

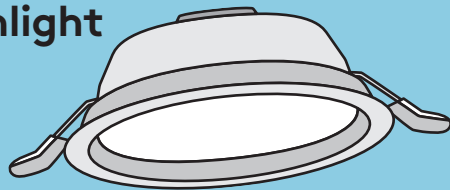

Ideal for:
Circulation corridors, reception areas, schools/universities and office/meeting rooms

Versatile, flexible and timeless, Amy is the ideal solution for a wide range of applications.




- **FLEX Feature (Lumen Output Switch):** The flexibility to decide on your lumen package on site with the flick of a switch
- **VARIO Feature (Colour Temperature Switch):** The ability to choose your colour temperature on site with the flick of a switch
- **New lightweight housing - compact, light and secure with IK06 rating**
- **Homogeneously lit opaque white diffuser**
- **Direct replacement for traditional 1x18W, 1x26W, 2x18W or 2x26W CFL downlights**
- **Easy, quick and tool-free installation** thanks to an integrated connector unit with a 4-pole piano-key terminal (for up to 2.5 mm wires) enabling loop-in loop-out wiring
- **JUST - adapt on-site to an emergency version** using the Just Emergency PLUG&PLAY kit



	Ø	H	Cutout
AMY 100	117	41	100 - 105
AMY 150	168	56	150 - 155
AMY 190	230	81.5	190 - 215
AMY 220	250	81.5	220 - 240

Dimensions (mm)



Specification

Electrical class	II
Ambient operating temperature	-20°C to +40°C (E3: 0 to +40°C)
IP	IP44 (room side) IP20 (from above)

Installation / Mounting

Installation	Recessed installation into a wide range of ceiling types 4-pole terminal in a connector unit integrated into driver for tool-free wiring, also enabling loop-in loop-out Can be covered with insulation material, IC-4 rated"
--------------	---

Material / Finish

Body	Polycarbonate, white (RAL9003)
Diffuser	Polycarbonate, TPA

Light source information


VARIO (Colour temperature switch)	3000K, 3500K, 4000K
FLEX (Lumen switch)	100 460lm (4W), 700lm (6W) 150 950lm (8W), 1150lm (10W), 1500lm (13W) 190/200 1400lm (12W), 1600lm (14W), 1950lm (17W)
Efficiency	115 lm/W
Total emergency flux	450
Lifetime	50000 hours (@L80, Ta 25°C)
MacAdam (Initial)	4

VARIO and FLEX feature

There is no need to worry about lumen packages or colour temperatures anymore – it's always the same product and the adaption to your application can be done directly on site:



Colour temperature switch

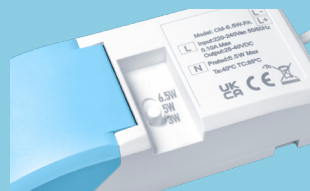

Lumen output switch

Ordering guide

Description	SAP Code
AMY VARIOFLEX 100 700 830/35/40	96638035
AMY VARIOFLEX 150 1500 830/35/40	96638036
AMY VARIOFLEX 190 1950 830/35/40	96638170
AMY VARIOFLEX 220 1950 830/35/40	96638037
Accessories	
JUST E3 PLUG&PLAY KIT MANUALTEST LiFePo4	96635766
REPLACEMENT BATTERY for 96634428	59011337
JUST E3 PLUG&PLAY KIT SELFTEST LiFePo4	96634428
DRV TE AMY VF 200 V1	59013915