


# Amy Vario

## Recessed LED Downlight



With a pleasing aesthetic,  
Amy Vario is the ideal  
solution for a vast range  
of applications

- Three colour temperatures in one product – simply select 3000 K (warm white), 3500 K or 4000 K (neutral white) to suit the application use
- Consistent light output with no shadowing
- The fully detachable connector allows for first fix wiring and high voltage circuit testing whilst the luminaire is detached from the connector
- Easy, quick and tool-free installation thanks to an external connector box with a 4-pole push-terminal enabling loop-in loop-out wiring
- Replacement for traditional 1×18 W, 1×26 W, 2×18 W or 2×26 W compact fluorescent downlights
- Suitable for use with phase-cut dimmer switches from approved manufacturers
- Suitable to use with the Just Emergency PLUG&PLAY E3 KIT for 3 hours emergency operation (available separately)

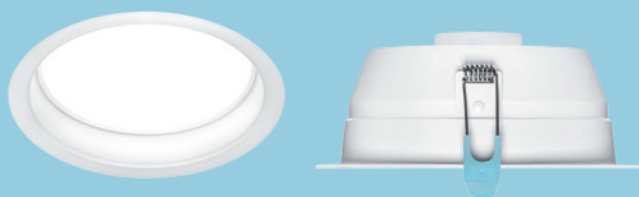

Ø 120 - 250 mm



CCT switch  
(3000 K, 3500 K  
and 4000 K)



700–2000  
lumens, up  
to 100 lm/W



100, 150 and  
200–240 mm  
cut-outs



IP44: splash  
resistant



Dimmable



Save up to  
80 % energy  
compared  
to compact  
fluorescent  
downlights

### Ideal for ...



Corridors






Reception  
areas



Offices and  
meeting rooms



Schools and  
universities

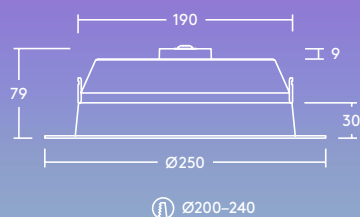


## Light distribution

100lm/W



### Amy Vario LED 2000lm

cd/klm ULOR: 0 %  
DLOR: 100 %  
LOR: 100 %



## Ordering guide

Description	SAP Code
AMY VARIO 100 LED DL 700 830/35/40	96632753
AMY VARIO 150 LED DL 1000 830/35/40	96632754
AMY VARIO 150 LED DL 1500 830/35/40	96632755
AMY VARIO 200 LED DL 2000 830/35/40	96632756
<b>Accessories</b>	
THORNeco Connector	96631101
Just E3 PLUG&PLAY Kit SelfTest LiFePO4	96634428
Just E3 PLUG&PLAY Kit ManualTest LiFePO4	96635766

## Light source information

- Lifetime 50 000 hours (@L80, Ta 25 °C)
- 700lm (7W), 1000lm (10W), 1500lm (15W), 2000lm (20W), up to 100lm/W
- Colour temperature 3000K, 3500K and 4000K in one product
- CRI 80
- MacAdam (initial): 4

## Specification

- Class II electrical
- IP44
- IK03
- Ambient operating temperature: -20 to +40 °C



## Installation/Mounting

Amy Vario can be installed into a wide range of ceiling types of 2–20 mm thickness.

## Material/Finish

- Body: Steel, white finish (RAL 9003)
- Diffuser: Polycarbonate

