


Anna



Ideal for:
Schools/universities
and office/meeting rooms

Recessed LED Panel

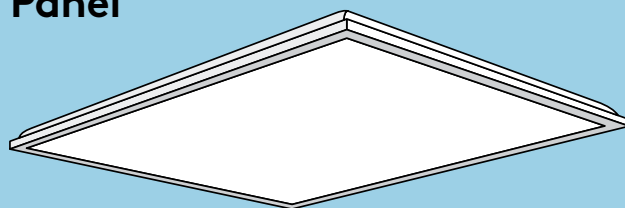

Providing high quality light with low glare and high efficiency.



- **VARIO Feature (Colour Temperature Switch):** The ability to choose your colour temperature on site with the flick of a switch
- **FLEX Feature (Lumen Output Switch):** The flexibility to decide on your lumen package on site with the flick of a switch
- Integrated self-test emergency indicator with the JUST E3 self-test kit
- Energy efficient with 126 lm/W
- Gentle, soft and glare free lighting with UGR <19
- Direct replacement for 4x14W T5 or 4x18W T8 fluorescent panels
- Easy, quick and tool-free installation thanks to an integrated connector with a 4-pole push terminal (for up to 2.5 mm² wires) enabling loop-in loop-out wiring
- The detachable connector enables first fix wiring and high voltage circuit testing while the luminaire is detached
- JUST – adapt on-site to an emergency version using the Just Emergency PLUG&PLAY kit

Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C
Driver	ENEC certified
DALI	DALI-2 and SwitchDim – suitable for emergency escape lighting systems acc. to EN 50172

Installation / Mounting

Mounting	Safety wire included in Q596 and 12x3 versions
Installation	Lay-in installation in T-bar ceiling grids – suitable for suspended, surface and plaster board installation (accessories available separately)

Material / Finish

Frame	Aluminium
Diffuser	Q596/622/12x3: PS, opal. 12x6: micro-prismatic PS
Light guide panel	Q596/622/12x3: PC, TPb rated. 12x6: PS, TPb rated
Backplate	Steel sheet

Light source information

VARIO (Colour temperature switch)	3000 K, 3500 K, 4000 K
FLEX (Lumen switch)	Q596, Q622 & 1200x300: 3000lm (23W), 3750lm (29W), 4000lm (31W), 4400lm (35W) 1200x600: 3600lm (25W), 4600lm (32W), 5600lm (40W), 6600lm (47W)
Efficiency	up to 140 lm/W (1200x600)
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	4

Controllability (DALI-2)

Dimming level	1-100 %
---------------	---------

VARIO and FLEX feature

There is no need to worry about lumen packages or colour temperatures anymore – it's always the same product and the adaption to your application can be done directly on site:



Colour temperature switch



Lumen output switch

Ordering guide


Description	SAP Code	CAT No.
ANNA VARIOFLEX 3 Q596 4400 830/35/40	96638248	AN4400VF36X6
ANNA VARIOFLEX 3 12x3 4400 830/35/40	96638250	AN4400VF312X3
ANNA VARIOFLEX 3 Q596 4400 830/35/40 DALI	96638251	AN4400XVF36X6
ANNA VARIOFLEX 3 12x3 4400 830/35/40 DALI	96638253	AN4400XVF312X3
ANNA VARIOFLEX 3 12x6 6600 830/35/40	96638246	AN6600VF312X6
ANNA VARIOFLEX 3 12x6 6600 830/35/40 DALI	96638247	AN6600XVF312X6

Accessories

TECO SURFACE MOUNT BOX Q596	96701909	ECO6X6SURBOXV2
TECO SURFACE MOUNT BOX 12x3	96701911	ECO12X3SURBOXV2
TECO 12x6 SURFACE MOUNT BOX	96701908	ECO12X6SURBOXV2
TECO ANNA V RECESSED SPRINGS	96700007	ANVF2PBSRING
TECO ANNA VF 3 CONNECTOR DRIVER	59014038	ANCONDR
TECO SUSPENSION KIT	96638254	ECOSUSKIT
JUST E3 PLUG&PLAY KIT SELFTEST LiFePO4	96634428	ECOE3TLIFEKIT
JUST E3 PLUG&PLAY KIT MANUALTEST LiFePO4	96635766	ECOE3MLIFEKIT
REPLACEMENT BATTERY FOR 96634428	59011337	ECOE3TLIFEBAT

830–3000K / 835–3500K / 840–4000 K

Dimensions (mm)



	L	W	H1	H2
ANNA Q596	596	596	35	60
ANNA Q622	622	622	35	60
ANNA 1200 x 300	1196	296	35	60
ANNA 1200 x 600	1196	596	35	60