


# Barry

## LED batten

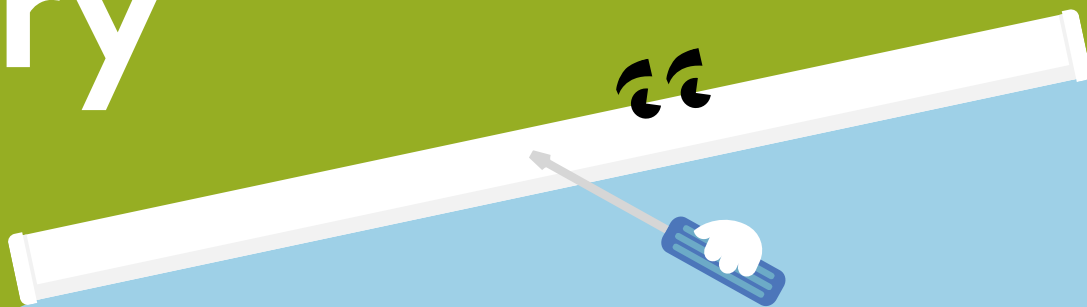

### Meet Barry

Calm and composed, Barry blends perfectly into a range of indoor settings

- Direct replacement for conventional battens in terms of light performance and length
- Reliable integrated LED technology, ensuring maintenance-free installation and a long lifetime
- Homogeneous illumination
- High efficacy of 100 lm/W
- Choose between cool white (4000K) and daylight (6500K) to suit application use



2400, 4000  
and 6000  
lumens,  
100 lm/W



50 000 hours  
lifetime



600mm  
(2400 lm),  
1200 mm  
(4000 lm)  
and 1500 mm  
(6000 lm)



Save up to  
60% energy  
compared  
with  
fluorescent  
battens

Ideal for...



Corridors



Warehouses




Workshops

### Light source information

- 2400 lm (24 W), 4000 lm (40 W) and 6000 lm (60 W), 100 lm/W
- 4000 K cool white LED or 6500 K daylight white LED
- 50 000 hour rated life (@L80B50, Ta 25 °C)
- CRI 80
- Beam angle: 120°
- McAdam (initial): 5 step





	L	W	H
BARRY LED 600 2400 840	600	66	69
BARRY LED 1200 4000 840	1200	66	69
BARRY LED 1500 6000 840	1500	66	69




## Lighting distribution

### Barry 4000lm

cd/klm ULOR: 14% DLOR: 86% LOR: 100%

100lm/W  



## Ordering guide

Description	Wt (kg)	SAP Code
BARRY LED 600 2400 840	0.8	96631215
BARRY LED 1200 4000 840	1.6	96630490
BARRY LED 1500 6000 840	2.0	96630491
BARRY LED 1200 4000 865	1.6	96631439
BARRY LED 1500 6000 865	2.0	96631440

### Installation/Mounting

- Surface mounting (screws included)

### Material/Finish

Body: steel, powder coated, white (RAL 9003)

Diffuser: PC, IP40, opal white

End caps: PC, white

### Specification

- Class I electrical
- IP20
- IK08

