

# Anna

## Recessed LED Panel



### Meet Anna

Low glare and calm,  
Anna is the universal  
talent for desk space  
environments

- Gentle, soft and glare free lighting (UGR <19) thanks to a Light Guide Plate with innovative laser engraving
- Smooth opal diffuser for fully homogeneous illumination
- Even surface and IP44 (from below) for hassle-free cleaning
- Elegant and timeless design with slim metal frame of only 8.5 mm depth
- Replaces conventional luminaires with 4x18 W T8 and offers up to 60% energy saving
- Easy, quick and tool-free installation thanks to an external connector box with a 4-pole push-terminal (for up to 2.5 mm<sup>2</sup> wires) enabling loop-in loop-out wiring
- The fully detachable connector allows for first fix wiring and high voltage circuit testing whilst the luminaire is detached from the connector



3200, 3500,  
3800, 4200 lm  
up to  
106 lm/W



IP44  
(from below):  
Splash  
resistant for  
hassle-free  
cleaning



UGR <19:  
gentle, soft  
and glare-free  
lighting for  
office  
applications



596 x 596 mm  
622 x 622 mm  
1196 x 296 mm



3h emergency  
version  
available



50 000 hours  
lifetime

### Ideal for...




Offices and  
meeting rooms



Schools and  
universities

### Light source information

- 3200 lm (33 W), 3500 lm (33 W), 3800 lm (40 W), 4200 lm (40 W), up to 106 lm/W
- 50 000 hour rated life (@L70, Ta 25 °C)
- CRI 80
- McAdam (initial): 4 step
- UGR <19

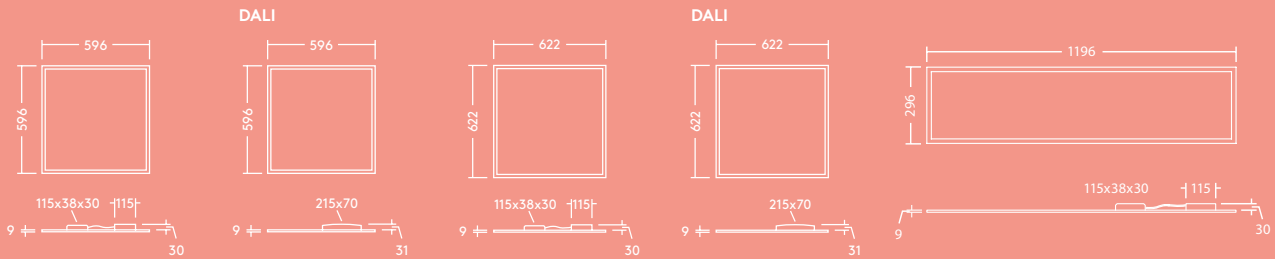


## Lighting distribution

### Anna 3500lm

cd/klm ULOR: 0% DLOR: 100% LOR: 100%

106lm/W



### Installation/Mounting

- Lay-in installation in T-bar ceiling grids
- Suitable for suspension, surface and recessed installation

### Material/Finish

Frame: Aluminum, white (RAL 9003)  
 Anna standard: TpB rated diffuser; PET, opal  
 Anna with TpA rated diffuser: PC, opal  
 Light guide plate: PS  
 Backplate: Steel sheet

### Specification

- Class II electrical
- IP44 (from below), IP20 (from above)
- IK02
- ENEC certified driver

## Ordering guide

Description	Wt (kg)	SAP Code
ANNA LED Q596 3500 840	2.58	96630066
ANNA LED Q622 3500 840	2.77	96630067
ANNA LED Q596 3200 830	2.58	96630069
ANNA LED Q622 3200 830	2.77	96630070
★ ANNA LED 1200x300 4200 840	2.68	96631380
★ ANNA LED 1200x300 3800 830	2.68	96631381
<b>Emergency version</b>		
ANNA LED Q596 3500 840 E3	3.31	96630068
<b>DALI</b>		
★ ANNA LED Q596 3500 840 HFIX	2.71	96631113
★ ANNA LED Q622 3500 840 HFIX	2.9	96631114
★ ANNA LED Q596 3200 830 HFIX	2.71	96631116
★ ANNA LED Q622 3200 830 HFIX	2.9	96631117
★ ANNA LED Q596 3500 840 HFIX E3	3.12	96631115
<b>Versions with TpA rated diffuser</b>		
★ ANNA LED Q596 3500 840 TpA	2.76	96630359
★ ANNA LED Q596 3500 840 TpA E3	3.52	96630360
★ ANNA LED Q596 3500 840 HFIX TpA	2.92	96631118
★ ANNA LED Q596 3500 840 HFIX TpA E3	3.33	96631119
<b>Accessories</b>		
ANNA Q596 Recessed Mount Box	2.0	96630224
ANNA Q622 Recessed Mount Box	2.5	96630225
ANNA Q596 Slim Surface Mount Box	2.0	96630226
ANNA Q622 Slim Surface Mount Box	2.1	96630227
★ ANNA 1200x300 Slim Surface Mount Box	2.1	96631384
ANNA Suspension Kit	0.03	96630223
★ ANNA 1200x300 Suspension Kit	0.13	96631383
★ ThornEco Connector	0.085	96631101

830–3000K, 840–4000K

★ New