


# Anna

## Recessed LED Panel

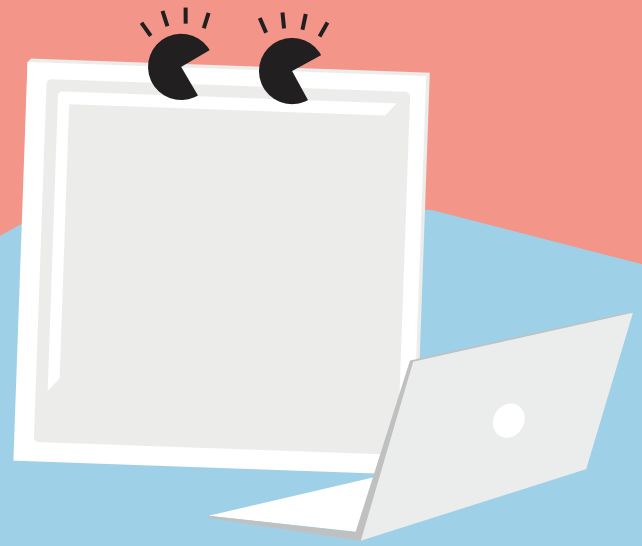

### Meet Anna

Low glare and calm,  
Anna is the universal  
talent for desk space  
environments

- Gentle, soft and glare free lighting (UGR <19) thanks to a Light Guide Plate with innovative laser engraving
- Smooth opal diffuser for fully homogeneous illumination
- Even surface and IP44 (from below) for hassle-free cleaning
- Elegant and timeless design with slim metal frame of only 8.5 mm depth
- Replaces conventional luminaires with 4×18 W T8 or 2×36 W T8 and offers up to 60 % energy saving
- Easy, quick and tool-free installation thanks to an integrated connector with a 4-pole push-terminal (for up to 2.5 mm<sup>2</sup> wires) enabling loop-in loop-out wiring
- The fully detachable connector allows for first fix wiring and high voltage circuit testing whilst the luminaire is detached from the connector



3750 lm,  
110 lm/W



IP44  
(from below):  
Splash  
resistant for  
hassle-free  
cleaning



UGR <19:  
gentle, soft  
and glare-free  
lighting for  
office  
applications



596 × 596 mm  
622 × 622 mm  
1196 × 296 mm



3 h emergency  
version  
available



50 000 hours  
lifetime

### Ideal for...




Offices and  
meeting rooms



Schools and  
universities

### Light source information

- 596 × 596 & 622 × 622: 3400 lm @ 3000 K (34 W), 3750 lm @ 4000 K (34 W), up to 110 lm/W
- 1196 × 296: 4000 lm @ 3000 K (40 W), 4400 lm @ 4000 K (40 W), up to 110 lm/W
- 50 000 hour rated life (@L80, Ta 25 °C)
- CRI 80
- MacAdam (initial): 4 step
- UGR <19

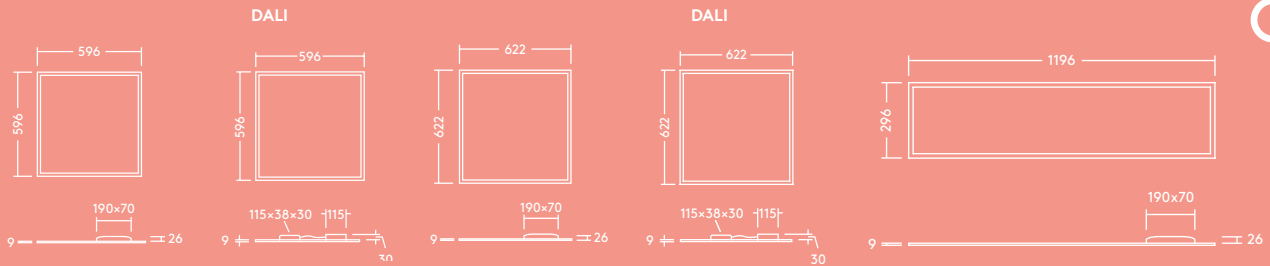


## Lighting distribution

### Anna 3750 lm

cd/klm ULOR: 0 % DLOR: 100 % LOR: 100 %

110lm/W

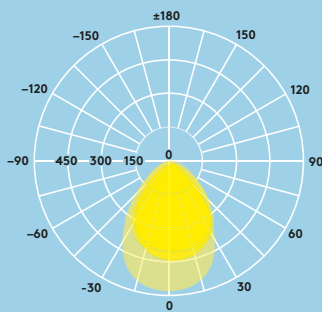

### Installation/Mounting

- Lay-in installation in T-bar ceiling grids
- Suitable for suspension, surface and recessed installation

### Material/Finish

Frame: Aluminum, white (RAL 9003)  
 Diffuser: TpB rated, PET, opal  
 Light guide plate: PS  
 Backplate: Steel sheet

### Specification

- Class II electrical
- IP44 (from below), IP20 (from above)
- IK02
- ENEC certified driver
- Ambient operating temperature: -20 to +40 °C (E3: 0 to +25 °C)

## Ordering guide

Description	Wt (kg)	SAP Code
ANNA LED Q596 3750 840	2.58	96630066
ANNA LED Q622 3750 840	2.77	96630067
ANNA LED Q596 3400 830	2.58	96630069
ANNA LED Q622 3400 830	2.77	96630070
ANNA LED 1200 × 300 4400 840	2.68	96631380
ANNA LED 1200 × 300 4000 830	2.68	96631381
<b>Emergency version</b>		
ANNA LED Q596 3750 840 E3	3.31	96630068
<b>DALI</b>		
ANNA LED Q596 3750 840 HFIX	2.71	96631113
ANNA LED Q622 3750 840 HFIX	2.9	96631114
ANNA LED Q596 3400 830 HFIX	2.71	96631116
ANNA LED Q622 3400 830 HFIX	2.9	96631117
ANNA LED Q596 3750 840 HFIX E3	3.12	96631115
<b>Accessories</b>		
ANNA Q596 Recessed Mount Box	2.0	96630224
ANNA Q622 Recessed Mount Box	2.5	96630225
ANNA Q596 Slim Surface Mount Box	2.0	96630226
ANNA Q622 Slim Surface Mount Box	2.1	96630227
ANNA 1200 × 300 Slim Surface Mount Box	2.1	96631384
ANNA Suspension Kit	0.03	96630223
ANNA 1200 × 300 Suspension Kit	0.13	96631383
Just Emergency PLUG&PLAY E3 Kit	0.36	96628839

830–3000K, 840–4000K



Five year guarantee