



Balder

Industrial IP23 batten

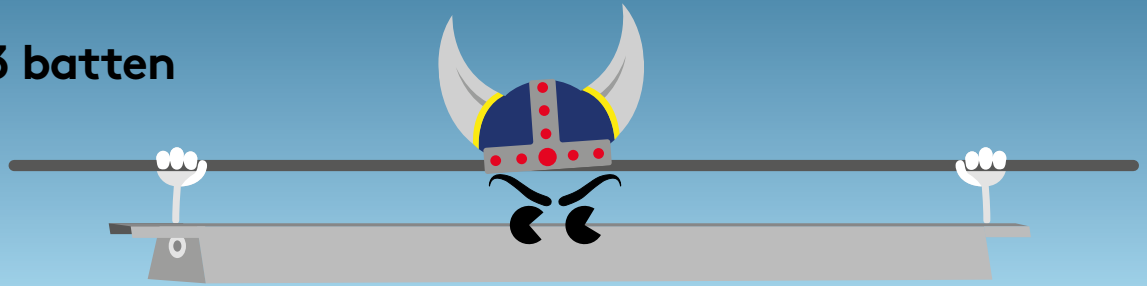

Perfect for retrofit and new installations, Balder has a classic IP23 design with a focus on quick and easy installation

- Two different lens options for deep beam or batwing distribution
- Always through-wired 5 pole terminal block
- Suitable for surface mounting or catenary suspension (build-in option - no loose parts)
- Quick and easy installation via maintained gear tray
- 1745 mm length makes it perfect for retrofit
- High efficacy: 9000 lm model delivers 170 lm/W, and the 12000 lm model delivers 160 lm/W

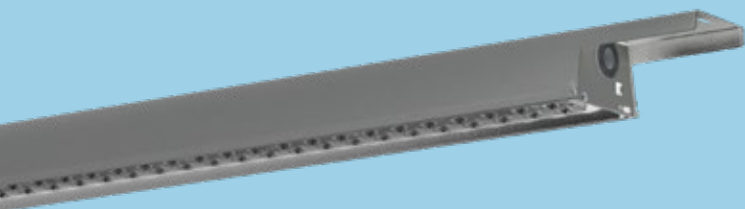

100 000 h lifetime before luminous flux is reduced to 70 % of the initial value



12 000 lm and 9000 lm lens



1745 mm



IP23: splash resistant



Through-wired



Tool free installation

Ideal for ...



Warehouses



Storages



Production plants



Commercial



Distribution centres



Light source information

- 12000lm (75W), 9000lm (52W)
- 4000K
- Lifetime: 100000 hours rated life (@L70, Ta 25°C)
- CRI 80
- McAdam (initial): 3 step

Installation/Mounting

Suitable for surface mounting or catenary suspension

Material/Finish

Body: Galvanized sheet steel

Specification

- Class I electrical
- IP23
- IK07

Ordering guide

Description	SAP Code
BALDER 1745 IP23 12000 840 MB	96634219
BALDER 1745 IP23 9000 840 WB	96634221

