

# Freja Vario Flex

IP44 LED Batten



Ideal for refurbishment projects or new installation, Freja Vario Flex offers you a truly flexible solution

- FLEX Feature (Lumen switch): Decide on your lumen package per lumen switch directly on site for two sizes (1200 mm and 1500 mm)
- VARIO Feature (Colour temperature switch): 3000K (warm white), 3500K or 4000K (neutral white)
- FLEX combined with VARIO – for easier warehouse management and your full flexibility onsite
- High efficiency of up to 149 lm/W
- Two cable entries from back and one each end. Cable entries at the ends already broken out for easy installation
- Integrated cable holders



100 000 h lifetime before luminous flux is reduced to 70 % of the initial value

Three lumen packages per length with up to 149 lm/W

3000K, 3500K and 4000K



IP44: splash resistant

IK08 impact resistance

1200 mm and 1500 mm

Ideal for ...



Circulation Areas




Garages



Storage Rooms



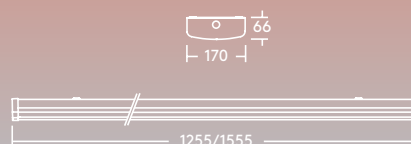

### Light source information (default)

– Flex @ 4000 K:		– 3000 K, 3500 K and <b>4000 K</b>
<b>1200 mm</b>	<b>1500 mm</b>	– Lifetime: 100 000 hours rated life (@L70, Ta 25°C)
<b>4200 lm</b>	<b>7000 lm</b>	– CRI 80
3200 lm	5250 lm	– McAdam (initial): 3 step
2100 lm	3500 lm	

## Ordering guide

Description	SAP Code
FREJA VARIOFLEX 1200 4200 830/35/40	96636005
FREJA VARIOFLEX 1500 7000 830/35/40	96636006

### Installation/Mounting

- Suitable for surface mounting

### Material/Finish

- Diffuser: Microprismatic Frosted Polycarbonate
- Body: Sheet Steel (white)
- Endcaps: Polycarbonate (white)

### Specification

- Class I electrical
- IP44
- IK08

