


Lily

Recessed IP44 LED Downlight

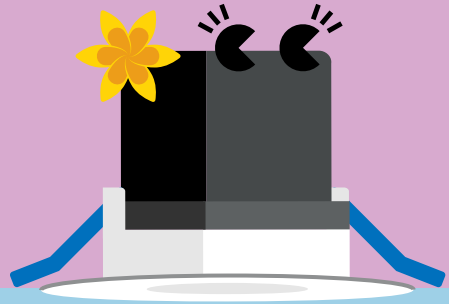

New

With many different faces,
Lily is the ideal solution for
every style

- Recessed IP44 downlight with 24°, 38° or 60° beam angle
- Customizable: different bezel trims, light engines and pendant cans available
- Two different lumen packages: 600 or 850 lumens
- Choice of 2700 K, 3000 K or 4000 K to suit application use
- Product height of only 59 mm: fits various ceiling types
- LED driver suitable for use with leading and trailing edge dimmers from approved manufacturers
- Tool free and fast wiring thanks to the two connectors with press-fit terminal blocks enabling convenient loop-in loop-out
- Can directly be covered with insulation materials
- Ideal one to one replacement for 35W and 50W halogene downlights and up to 90% energy saving
- Suitable to use with the Just Emergency Plug&Play E3 KIT (separately available)
- Extend the possible applications by using the pendant can accessory, complete with canopy, 1.5 meter suspension cable and silver or black reflector.



600 and
850 lumens,
100 lm/W



50 000 hours
lifetime



Dimmable



IP44: splash
resistant OR
IP65: Dust
tight and
water resistant
(from below)



68 mm cut-out



2700 K and
3000 K warm
white or 4000 K
neutral white

Ideal for...



Residential




Reception
areas



Hotels



THORN
eco

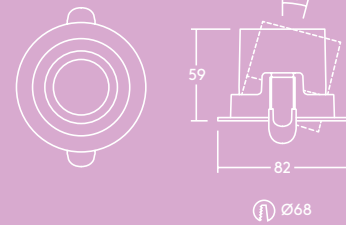

Pendant cans WH + BLK



Trim square WH




Trim square BLK



Trim square SIL



Trim round WH



Trim round BLK



Trim round SIL




Trim round IP65

Lighting distribution

100lm/W



Lily 600lm 38°
cd/klm ULOR: 0 %
DLOR: 100 %
LOR: 100 %

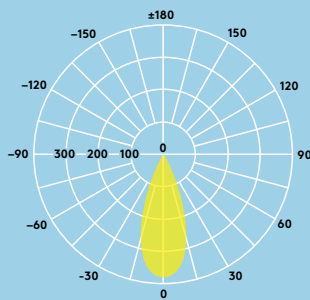

Light source information

- 600lm (6W); 100lm/W
- 850lm (8,5W); 100lm/W
- Color temperatures: 2700K, 3000K and 4000K
- Life time 50000 hours (@L80, Ta 25 °C)
- CRI ≥ 90
- MacAdam (initial): 3 step

Specification

- Class II electrical
- IP44 (from below), IP20 (from above); with optional IP65 trim: IP65 (from below), IP20 (from above)
- IK03
- Ambient operating temperature: -20 to 40 °C

Installation/Mounting

- Lily downlight can be installed into a wide range of ceiling types
- Mineral wool insulation can be placed directly over the top of the fitting

Material/Finish

Body: Aluminum heat sink, powder coated
Bezel trim: Aluminum, powder coated
Lens: PC

Ordering guide

Complete product - light engine plus round white adjustable trim included	Wt (kg)	SAP Code
LILY LED SPOT IP44 38° 68 600 930 ADJ WH*	0.36	96632287
LILY LED SPOT IP44 38° 68 600 940 ADJ WH*	0.36	96632288
LILY LED SPOT IP44 38° 68 850 930 ADJ WH*	0.36	96632290
LILY LED SPOT IP44 38° 68 850 940 ADJ WH*	0.36	96632291
Accessories - Light engines		
LILY LED SPOT IP44 24° 68 600 927**	0.27	96633274
LILY LED SPOT IP44 24° 68 600 930**	0.27	96633275
LILY LED SPOT IP44 24° 68 600 940**	0.27	96633276
LILY LED SPOT IP44 24° 68 850 927**	0.27	96633277
LILY LED SPOT IP44 24° 68 850 930**	0.27	96633278
LILY LED SPOT IP44 24° 68 850 940**	0.27	96633279
LILY LED SPOT IP44 38° 68 600 927**	0.27	96633280
LILY LED SPOT IP44 38° 68 600 930**	0.27	96633281
LILY LED SPOT IP44 38° 68 600 940**	0.27	96633282
LILY LED SPOT IP44 38° 68 850 927**	0.27	96633283
LILY LED SPOT IP44 38° 68 850 930**	0.27	96633284
LILY LED SPOT IP44 38° 68 850 940**	0.27	96633285
LILY LED SPOT IP44 60° 68 600 927**	0.27	96633286
LILY LED SPOT IP44 60° 68 600 930**	0.27	96633287
LILY LED SPOT IP44 60° 68 600 940**	0.27	96633288
LILY LED SPOT IP44 60° 68 850 927**	0.27	96633289
LILY LED SPOT IP44 60° 68 850 930**	0.27	96633290
LILY LED SPOT IP44 60° 68 850 940**	0.27	96633291
Accessories		
Just Emergency PLUG&PLAY E3 Kit	0.36	96628839
Just Emergency PLUG&PLAY SelfTest E3 Kit	0,36	96628840
Accessories - Trims & Cans		
Bezel trim round adjustable	0.080	96632298 96632302 96632303
Bezel trim square adjustable	0.085	96632300 96632304 96632305
Bezel trim IP65	0.075	96632301
Pendant can	0.377	96633292 96633293

*Complete product including trim, phase cut dimmable driver and loop in loop out connectors

**Light Engine including phase cut dimmable driver and loop in loop out connectors. Choose either a bezel trim or a pendant can to complete the product of your choice.