

Zoe Vario

Slim LED Downlight



Slim and adaptable, Zoe Vario is perfectly suited to everyday needs

- Product height of only 26 mm: fits various ceiling types
- Three colour temperatures in one product – simply select 3000 K (warm white), 3500 K or 4000 K (neutral white) to suit the application use
- Easy, quick and tool-free installation thanks to an integrated connector with a 3-pole push-terminal (for up to 2.5 mm² wires) enabling loop-in loop-out wiring
- Suitable to use with the Just Emergency PLUG&PLAY E3 KIT for 3 hours emergency operation (separately available)



CCT switch
(3000 K, 3500 K
and 4000 K)



Available in
700, 1000,
1600 and 2000
lumen versions



130, 170
and 210 mm
cut-outs



IP44:
splash resistant
(from below)



50 000 hours
lifetime before
luminous flux
is reduced to
80 % of the
initial value



220 mm version
with 2000 lm
also available
with DALI

Ideal for ...



Corridors



Reception
areas



Offices and
meeting rooms




Schools and
universities

Light source information Specification

- 700 lm (9 W), 1000 lm (12 W), 1600 lm (18 W) and 2000 lm (22 W) up to 90 lm/W
- Colour temperature 3000 K, 3500 K and 4000 K in one product
- 50 000 hours rated life (@L80, T_a 25°C)
- CRI80
- MacAdam (initial): 4 step
- Class II electrical
- IP44 (from below), IP20 (from above)
- IK02
- ENEC certified driver
- Ambient operating temperature: -10 to +40°C (E3: 0 to +25°C)


ZOE VARIO LED DL 130
 ZOE VARIO LED DL 170
 ZOE VARIO LED DL 210

| Ø | L | W1 | W2 | Ⓜ |
|-----|-----|----|----|-----|
| 145 | 145 | 20 | 26 | 130 |
| 180 | 180 | 20 | 26 | 170 |
| 220 | 220 | 20 | 26 | 210 |



Facilitating life

With only 26 mm product height, Zoe Vario fits various ceiling types ...

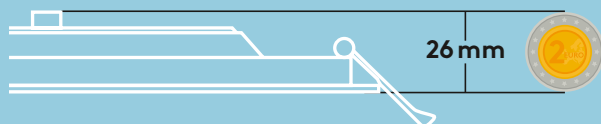

... and applications due to the Vario switch on the product's back to adjust the light colour on site



Zoe Vario 4000K



Zoe Vario 3500K



Zoe Vario 3000K

Installation/Mounting

- Recessed installation into a wide range of ceiling types
- Connector for tool-free wiring, also enabling loop-in loop-out
- Surface mounting option for ZOE VARIO 210



Material/Finish

Body: Aluminum white finish
 Diffuser: PS

Ordering guide

| Description | SAP Code |
|--|----------|
| ZOE VARIO LED DL 130 700 830/35/40 | 96632685 |
| ZOE VARIO LED DL 170 1000 830/35/40 | 96632686 |
| ZOE VARIO LED DL 210 1600 830/35/40 | 96632687 |
| ZOE VARIO LED DL 210 2000 830/35/40 | 96632688 |
| DALI | |
| ZOE VARIO LED DL 210 2000 830/35/40 HFIX | 96635241 |
| Accessories | |
| Just E3 PLUG&PLAY Kit SelfTest LiFePo4 | 96634428 |
| ZOE VARIO 210 SURFACE MOUNT BOX | 96635258 |

Portfolio overview

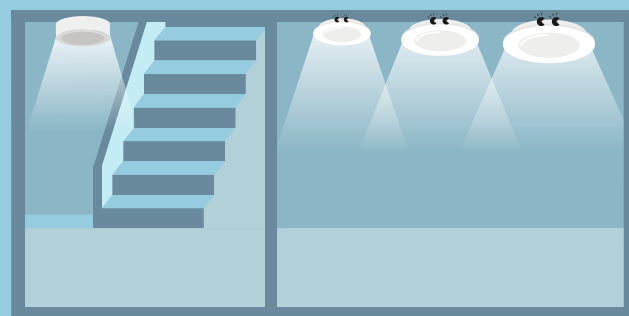

3000 K, 3500 K, 4000 K: 145 mm (700lm) | 180 mm (1000lm) |
 220 mm (1600lm & 2000lm + DALI)

