

# Ruby

Recessed LED panel



## Meet Ruby

Sophisticated and compact, Ruby creates a pleasant atmosphere in communication areas

- Elegant and lightweight design with a evenly lit surface
- Replaces conventional luminaires with 2 X 18W T8, 4 x 18W T8, 4 x 36W T8 and 2 x 36W T8 and offers more than 40% energy saving
- Ideal solution for any refurbishment job
- Supplied with 3 pin flex & plug (1.5m length)
- Suitable for recessed, surface and suspended mounting



1800, 3200 and 4500 lumens, up to 100lm/W



1200 x 300mm  
1200 x 600mm  
600 x 300mm  
and  
600 x 600mm



50 000 hours lifetime

### Ideal for...



Offices and meeting rooms



Schools and universities







Foyers and waiting-rooms

### Light source information

- 1800lm (18W), 4000K, 100lm/W
- 3200lm (32W), 4000K, 100 lm/W
- 4500lm (50W), 4000K, 90 lm/W
- CRI 80
- McAdam (initial): 4 step
- Beam angle: 110°

### Specification

- Class II electrical
- IP20
- Ambient operating temperature: -20 to +40 °C

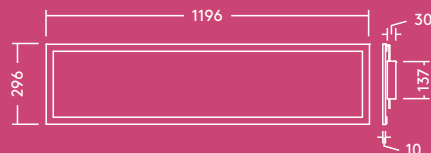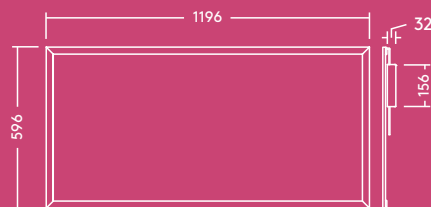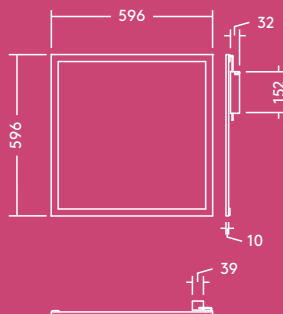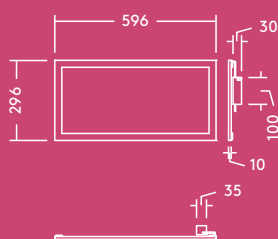


## Lighting distribution

### Ruby 3200lm

cd/klm ULOR: 0% DLOR: 100% LOR: 100%

100lm/W

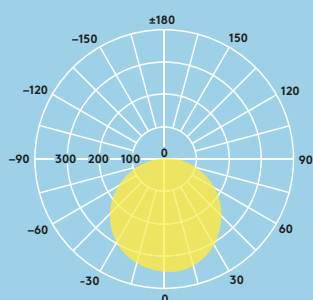

## Ordering guide

Description	Wt (kg)	SAP Code
RUBY LED 1200x300 3200 840 FP	3.32	96628981
RUBY LED 1200x600 4500 840 FP	4.75	96628982
RUBY LED 600x600 3400 840 FP	2.6	96631071
RUBY LED 600x300 2000 840 FP	1.3	96631070
<b>Accessories</b>		
RUBY LED 1200 x 300 Suspension Kit		96629238
RUBY LED 1200 x 600 Suspension Kit		96629085

### Installation/Mounting

- Lay-in installation in T-bar ceiling grids
- Suitable for suspension and surface mounting (available as accessories)

### Material/Finish

Body: Aluminum, white finish (RAL 9003)  
 Diffuser: high uniformity PS diffuser  
 Light guide plate: PMMA

