


Ruby

Recessed LED Panel

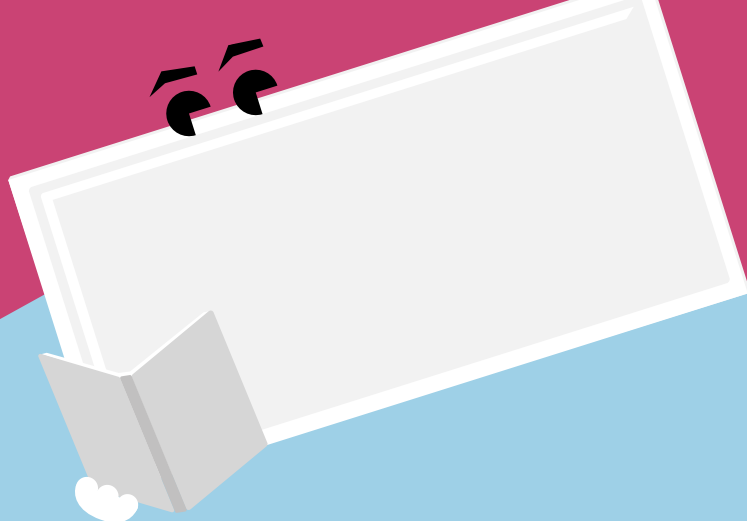

Meet Ruby

Sophisticated and compact, Ruby creates a pleasant atmosphere in communication areas

- Elegant and lightweight design with a evenly lit surface
- Replaces conventional luminaires with 2 × 18 W T8, 4 × 118 W T8, 4 × 136 W T8 and 2 × 136 W T8 and offers more than 40 % energy saving
- Ideal solution for any refurbishment job
- Supplied with 3 pin flex & plug (1.5 m length)
- Suitable for recessed, surface and suspended mounting



1800, 3200
and 4500
lumens, up to
100 lm/W



1200 × 1300 mm
1200 × 1600 mm
600 × 1300 mm
and
600 × 1600 mm



50 000 hours
lifetime

Ideal for...



Offices and
meeting rooms



Schools and
universities







Foyers and
waiting-rooms

Light source information

- 1800 lm (18 W), 4000 K, 100 lm/W
- 3200 lm (32 W), 4000 K, 100 lm/W
- 4500 lm (50 W), 4000 K, 90 lm/W
- CRI 80
- MacAdam (initial): 4 step
- Beam angle: 110°

Specification

- Class II electrical
- IP20
- Ambient operating temperature: -20 to +40 °C

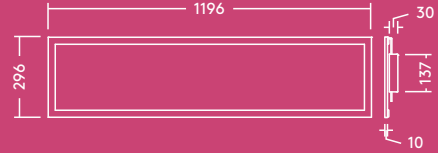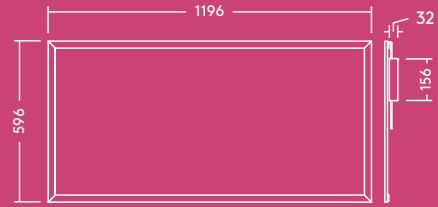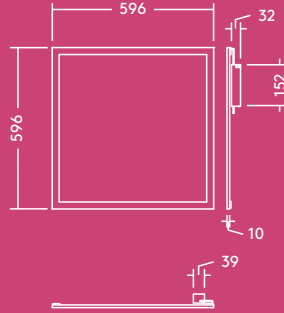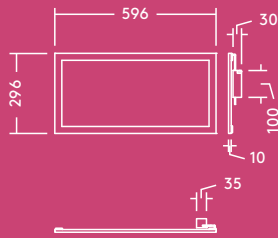


Lighting distribution

Ruby 3200lm

cd/klm ULOR: 0 % DLOR: 100 % LOR: 100 %

100lm/W

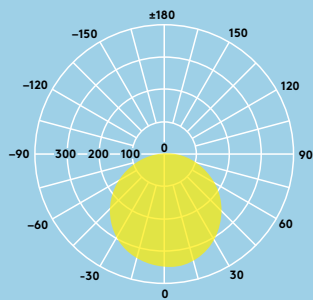

Ordering guide

Description	Wt (kg)	SAP Code
RUBY LED 1200 × 300 3200 840 FP	3.32	96628981
RUBY LED 1200 × 600 4500 840 FP	4.75	96628982
RUBY LED 600 × 600 3400 840 FP	2.6	96631071
RUBY LED 600 × 300 2000 840 FP	1.3	96631070
Accessories		
RUBY LED 1200 × 300 Suspension Kit		96629238
RUBY LED 1200 × 600 Suspension Kit		96629085

Installation/Mounting

- Lay-in installation in T-bar ceiling grids
- Suitable for suspension and surface mounting (available as accessories)

Material/Finish

Body: Aluminum, white finish (RAL 9003)
 Diffuser: high uniformity PS diffuser
 Light guide plate: PMMA

