

Tom Vario

Circular IP66 LED Bulkhead



Comfortable both indoors and out, Tom Vario is smarter, brighter and stronger

- Frosted diffuser ensures a homogeneous light effect and visual comfort
- Direct replacement for 2×26 W or 2×18 W CFL
- Switchable light colour: choose between warm white (3000K) and neutral white (4000K) to suit application use
- 2 different lumen packages: 1200lm and 2000lm
- Optional: Integrated microwave presence sensor maximizing the energy saving potential



Switchable light colour: 3000K and 4000K



Save up to 60% energy compared with CFL luminaires



50 000 hours lifetime



1200lm (14 W) and 2000lm (20 W), up to 100lm/W



IK10 rated impact resistance



Sealed to IP66 for protected exterior applications



Ideal for ...



Corridors



Public entrance areas




Stairwells





Underpasses



Toilets and bathrooms



Lighting distribution

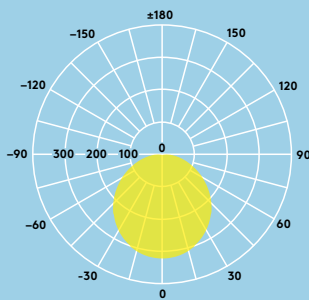

Tom Vario 2000lm
 cd/klm ULOR: 5 %
 DLOR: 95 %
 LOR: 100 %

Light source information

- 1200lm (14W), 86lm/W and 2000lm (20W), 100lm/W
- Colour temperature switch 4000K and 3000K
- Life time 50 000 hours (@L70, Ta 25°C)
- CRI80
- MacAdam (initial): 6 step

Specification

- Class II electrical
- IP66
- IK10
- Ambient operating temperature: -20 to +40°C

Installation/Mounting

- Suitable for wall or ceiling mounting
- Quick and easy installation thanks to a piano key terminal for wires up to 2.5mm²

Material/Finish

Body: White (RAL 9010), black (RAL 9005), polycarbonate (UV stabilised)
 Diffuser: Opal, polycarbonate (UV stabilised)


Ordering guide

Description	Wt (kg)	WH	BK
TOM VARIO LED 300 2000 830/40	0.75	TM2000ZWVK	TM2000ZBVK
TOM VARIO LED 300 2000 830/40 MWS	0.80	TM2000ZMWVK	TM2000ZMBVK
TOM VARIO LED 300 1200 830/40	0.75	TM1200ZWVK	TM1200ZBVK
TOM VARIO LED 300 1200 830/40 MWS	0.80	TM1200ZMWVK	TM1200ZMBVK

MWS: microwave sensor
 WH: white, BK: black

Sensor Range

at 100 % sensitivity

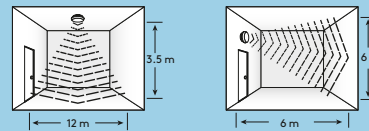

Controlability

Sensitivity	20 %, 50 %, 75 %, 100 %
Time	10s, 1min, 5min, 10min, 15min, 20min, 25min, 30min
lux	10lux, 20lux, 50lux, 100lux, 200lux, 300lux, 500lux, disable



Colour temperature switch