


# Chloe Vario

## Performance LED Downlight

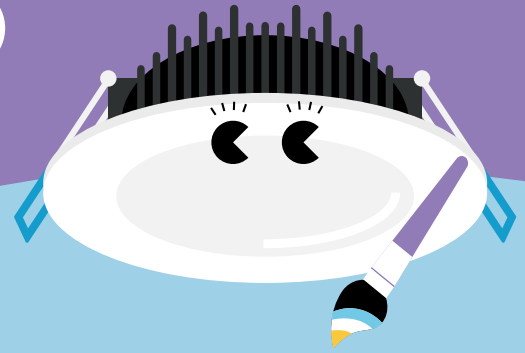

### Versatile and durable, Chloe Vario blends in a wide range of applications

- A slim ceiling recessed LED downlight with switchable light colour: choose between warm white (3000 K), cool white (4200 K) and daylight (5700 K) to suit application use
- Beam angle 95°
- High colour rendering and uniform light surface with no shadowing
- External electronic: dimmable LED driver suitable with trailing edge and universal dimmers\*
- Thermally optimised aluminium body
- Fitted with flex and plug
- Interchangeable trim rings available separately

\*see installation instructions for compatible dimmer list



Switchable light colour



800–945 lumens, up to 94.5 lm/W



IP44 (from below) IP20 (from above)



30 000 hours lifetime



Dimmable



Replacement for 1x18 W CFL

### Ideal for ...



Corridors



Reception areas





Offices and meeting rooms



Schools and universities




IC-4

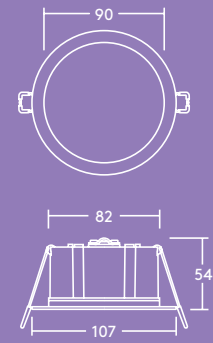

## Lighting distribution

85 lm/W

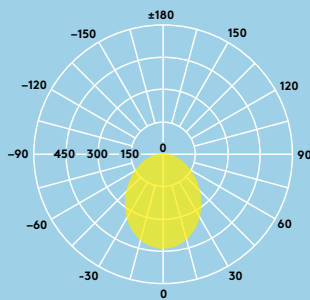

### Chloe Vario 850 lm

cd/klm ULOR: 0 %  
DLOR: 100 %  
LOR: 100 %

## Light source information

- Lifetime 30 000 hours (L70, Ta 25 °C)
- 3000K: 800lm (10W), 80lm/W
- 4200K: 945lm (10W), 94.5lm/W
- 5700K: 890lm (10W), 89lm/W
- CRI 80

## Installation/Mounting

- Chloe Vario LED can be installed into a wide range of ceiling types of 2–20 mm thickness

## Material/Finish

Body: Aluminium  
Trim: Metal, white

## Ordering guide

Description	Wt (kg)	SAP Code
CHLOE VAR LED 90 800 830/42/57 DIM WH FP	0.55	96631233
CHLOE VAR TRIM WH FLAT	0.03	96631234
CHLOE VAR TRIM SR REBATED	0.05	96631235
CHLOE VAR TRIM SR FLAT	0.03	96631236
CHLOE VAR TRIM BK REBATED	0.05	96631237
CHLOE VAR TRIM BK FLAT	0.03	96631238

## Specification

- Class II electrical
- IP44 (from below), IP20 (from above)
- IK02
- Insulation Coverable Luminaire and Driver (IC-4/IC-F)



96631238



96631234




96631236



96631237



included with the product



96631235

