


Emma

VARIO FLEX

LED Batten


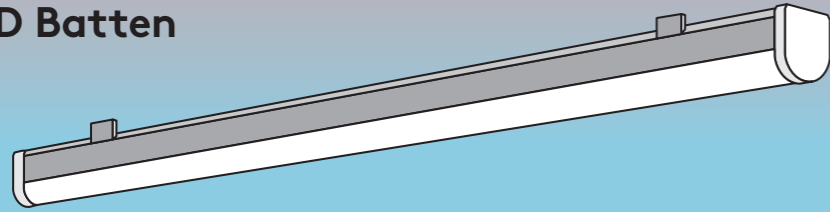


Ideal for: Breakout areas, circulation corridors and cove lighting

Sleek and sophisticated, Emma's effortless style fits right in.




- **VARIO Feature (Colour Temperature Switch):** The ability to choose your colour temperature on site with the flick of a switch
- **FLEX Feature (Lumen Output Switch):** The flexibility to decide on your lumen package on site with the flick of a switch
- Fully homogeneous illumination. Elegant design: lightweight brushed aluminium profile
- High efficacy of up to 145 lm/W
- Mounting directly onto ceiling or by using flexible mounting brackets for any fixing hole distance

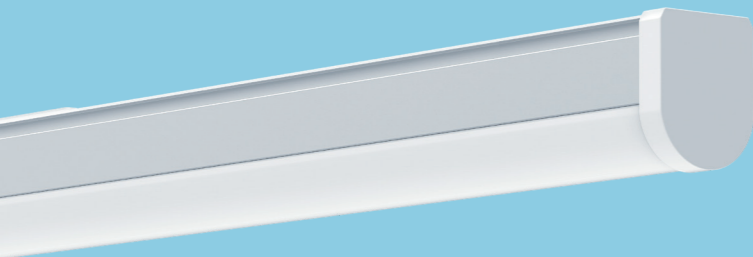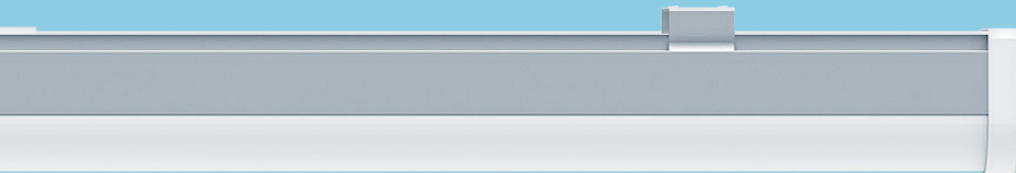

	L	W	H
EMMA S	605	43	53
EMMA M	1204	43	53
EMMA L	1504	43	53

Dimensions (mm)

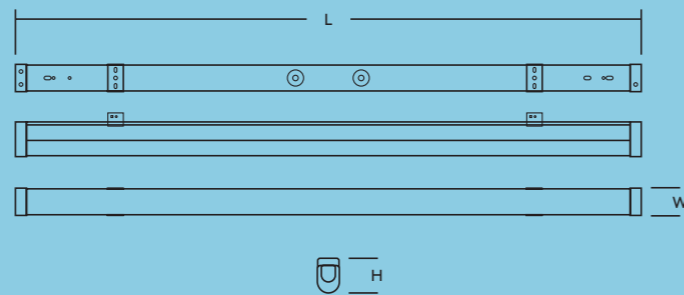

Specification

Electrical class	I
Ambient operating temperature	-20 to +40 °C

Installation / Mounting

Mounting	Surface mounting directly onto ceiling or with surface mount brackets (included) Suspended mounting with suspension kit (optional)
----------	---

Material / Finish

Body	Aluminium
Diffuser	PC, opal white
End cap	PC, white (RAL 9016)
Ceiling clips	Stainless steel

Light source information

VARIO (Colour temperature switch)	3000 K, 3500 K & 4000 K
FLEX (Lumen switch) 600mm	1000 lm(8W), 1500 lm(11W), 2000 lm(16W)
1200mm	2000 lm(32W), 3000 lm(22W), 4000 lm(30W)
1500mm	3000 lm(22W), 4500 lm(34W), 6000 lm(45W)
Efficiency	up to 145 lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	5

Ordering guide

Description	SAP Code
EMMA VARIO FLEX 600 2000 830/35/40	96635573
EMMA VARIO FLEX 1200 4000 830/35/40	96635574
EMMA VARIO FLEX 1500 6000 830/35/40	96635575
Accessories	
EMMA VARIO FLEX SUSPENSION KIT	96635576

MWS: microwave presence sensor