

Julie

IP65 LED Luminaire



Ideal for:



Workshops




Car Parks



Underpasses



Storage
Facilities

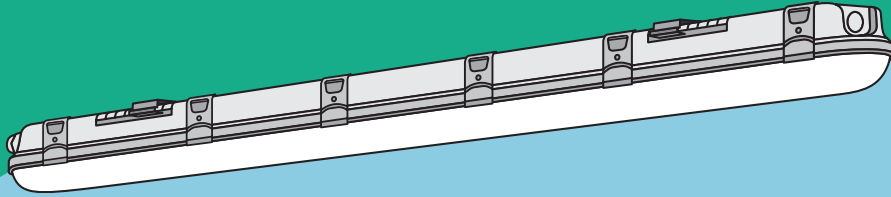

With a tough exterior, Julie is the optimal choice for industrial and commercial applications



Switchable
light colour



Switchable
lumen output



IP65:
Dust tight
and water
resistant



IK08 rated
impact
resistance



Lengths of
632, 1232 and
1532 mm




2h emergency
version
available



Presence
sensor with
corridor
function



- Switchable light colour: choose between neutral white (4000K), cool white (5000K) or daylight (6500K) to suit the application
- FLEX Feature (Lumen switch): The flexibility to decide on your lumen package on site makes Julie easy to stock and easy to use
- High quality, low energy lighting in wet and dusty environments

- High quality opal diffuser for uniform lighting
- Ideal for replacement and refurbishment projects, saving up to 65% energy compared to T8 fluorescent
- Versions with presence sensor and corridor function

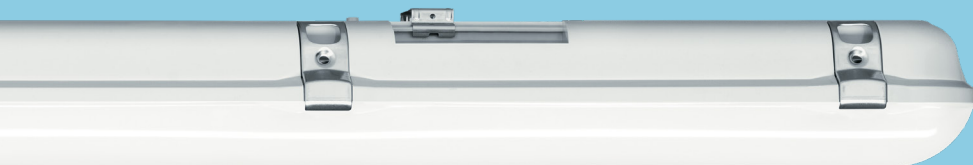

	L	W	H
JULIE VARIOFLEX 600	632	103	78
JULIE VARIOFLEX 1200	1232	103	78
JULIE VARIOFLEX 1500	1532	103	78

Dimensions (mm)

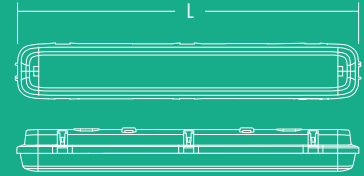

Specification

Electrical class	I
Ambient operating temperature	-20 to +40°C (E2: 0 to +25°C)
IP rating	IP65
IK rating	IK08

Installation / Mounting

Mounting	Suitable for surface mounting
----------	-------------------------------

Material / Finish

Canopy	Polycarbonate
Diffuser	Opal polycarbonate (UV stabilised)
Bracket	Stainless steel

Light source information

Flex (Lumen Switch)	600 mm	2200 lm (18W), 1500 lm (12W), 1000 lm (8W); up to 122 lm/W
	1200 mm	4200 lm (34W), 3200 lm (25W), 2200 lm (18W); up to 124 lm/W
	1500 mm	6300 lm (51W), 5200 lm (41W), 4200 lm (33W); up to 124 lm/W
Colour temperature	Choose between 4000K, 5000K or 6500K	
Efficiency	up to 164lm/W	
Lifetime	50 000 hours rated life (@L80, Ta 25°C)	
CRI	>80	
MacAdam (Initial)	4	

Ordering guide

Description	SAP Code
JULIE VARIOFLEX 600 2200 840/50/65	96652632
JULIE VARIOFLEX 1200 4200 840/50/65	96652631
JULIE VARIOFLEX 1500 6300 840/50/65	96652630
JULIE VARIOFLEX 1200 4200 840/50/65 MWS	96652634
JULIE VARIOFLEX 1500 6300 840/50/65 MWS	96652633
BARRY/JULIE E2 P&P KIT SELFTEST LiFePo4*	96652717
JULIE LED SPARE MOUNT KIT	96628409

MWS: microwave presence sensor

*Only suitable for the 1200mm and 1500mm versions


Presence & daylight sensor

Presence sensor with corridor function

Julie's microwave sensor option with corridor function will ensure that you never walk in the dark. The settings are fully adjustable, with the additional benefit of a daylight sensor.

Sensor range

at 100% sensitivity

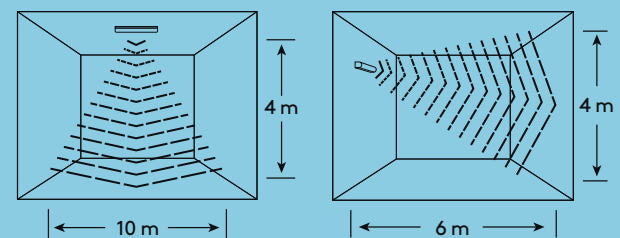

Controllability

Sensitivity	50%, 100%
Time	5s, 30s, 1min, 10min
Lux	2lux, 10lux, 50lux, disable
Stand-by time	0sec, 30sec, 20min, endless
Dimming level	10%, 20%, 30%, 50%