


Julie

FLEX

IP65 LED Luminaire




Ideal for indoor applications: Multi story car parks, workshops, underpasses and storage facilities

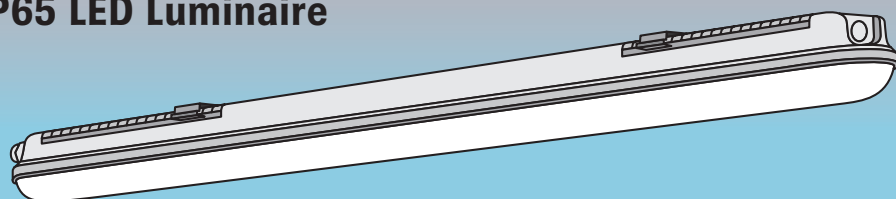


Clipless design for a more robust performance and easy installation.



- FLEX Feature (Lumen switch): The flexibility to decide your lumen package on site
- Click-fit clipless diffuser for increased robustness and easy installation
- Energy efficient with > 120lm/W. Save up to 60% energy compared to a T8 fluorescent
- Colour temperature 4000K
- IP65 Dust and water resistant and IK08 impact rated
- Perfect for retrofit projects – Flexible bracket sliders mean no re-drilling is required in 1:1 replacements
- CONNECT version with quick connector for easy installation available
- Quick access with flat head screwdriver for easy maintenance
- Versions with presence sensor and corridor function available
- Quick connect PLUG&PLAY Emergency function



	L	W	H
JULIE 600 LED IP65	635	94	76
JULIE 1200 LED IP65	1235	94	76
JULIE 1500 LED IP65	1535	94	76

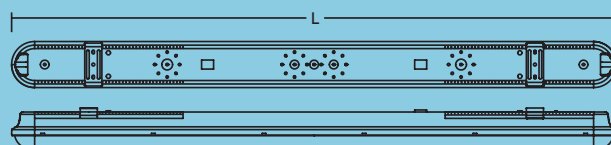

Specification

Electrical class	I
Ambient operating temperature	-20 to +40°C (E3: 0 to +25°C)
Driver	ENEC certified

Material / Finish

Canopy	Polycarbonate
Diffuser	Opal polycarbonate (UV stabilised)
Bracket	Stainless steel

Light source information

FLEX (Lumen switch)	
600mm	1000(8W), 1600 (12W), 2200lm (18W)
1200mm	2200 (18W), 3200 (25W), 4200lm (34W)
1500mm	4200 (33W), 5200 (41W) , 6300lm (51W) 4200 (33W) , 6300 (50W) 8600lm (72W)
Efficiency	> 120lm/W
Lifetime	50000 hours (@L70, Ta 25°C)
MacAdam (Initial)	4

Controllability

Sensitivity	10%, 50%, 75%, 100%
Time	5s, 30s, 60s, 5min, 10min, 20min, 30min
Lux	2lux, 10lux, 50lux, disable
Stand-by time	0sec, 10sec, 1 min, 10min, 30min, 60min, endless
Dimming level	10%, 20%, 30%, 50%

Ordering guide

Description	Cat No.
JULIE FLEX 1200 4200 840	96700011
JULIE FLEX 1200 4200 840 QC	96700012
JULIE FLEX 1200 4200 840 COR MWS	96700013
JULIE FLEX 1200 4200 840 DALI	96700014
JULIE FLEX 1200 4200 840 TW	96636476
JULIE FLEX 1500 6300 840	96700015
JULIE FLEX 1500 6300 840 QC	96700016
JULIE FLEX 1500 6300 840 COR MWS	96700017
JULIE FLEX 1500 6300 840 DALI	96700018
JULIE FLEX 1500 6300 840 TW	96636477
JULIE FLEX 1500 8600 840	96700019
JULIE FLEX 1500 8600 840 QC	96700020
JULIE FLEX 1500 8600 840 TW	96637478
JULIE FLEX 600 2200 840	96700023
JULIE FLEX 600 2200 840 DALI	96700024
JUST E3 LINEAR P&P KIT SelfTest LiFePo4	96700027
JULIE FLEX SPAREMOUNT KIT	59013251

MWS: microwave presence sensor

COR: corridor function

TW: through-wired

QC: with quick connector

Presence sensor with corridor function

Julie's microwave sensor option with corridor function will ensure that you never walk in the dark. The settings are fully adjustable, with the additional benefit of a daylight sensor. Option to connect several luminaires together onto one sensor, for simultaneous functionality.

Sensor range

at 100% sensitivity

