


# Julie

FLEX

## IP65 LED Luminaire



**Ideal for indoor applications:** Multi story car parks, workshops, underpasses and storage facilities

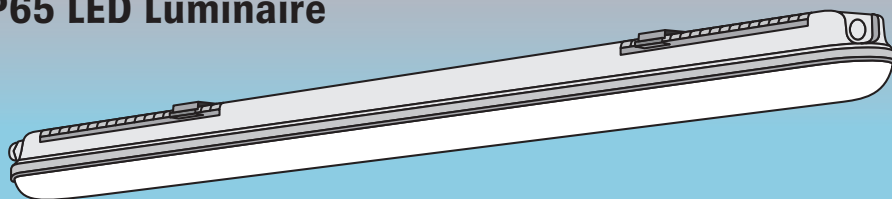

**Clipless design for a more robust performance and easy installation.**






IP65



IK08



- FLEX Feature (Lumen switch): The flexibility to decide your lumen package on site
- Click-fit clipless diffuser for increased robustness and easy installation
- Energy efficient with  $> 120\text{lm/W}$ . Save up to 60% energy compared to a T8 fluorescent
- Colour temperature 4000 K
- IP65 Dust and water resistant and IK08 impact rated
- Perfect for retrofit projects – Flexible bracket sliders mean no re-drilling is required in 1:1 replacements
- CONNECT version with quick connector for easy installation available
- Quick access with flat head screwdriver for easy maintenance
- Versions with presence sensor and corridor function available
- Quick connect PLUG&PLAY Emergency function

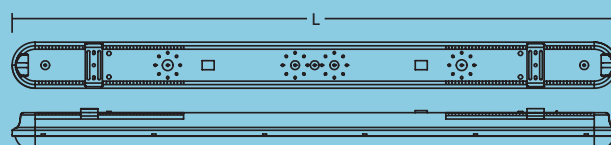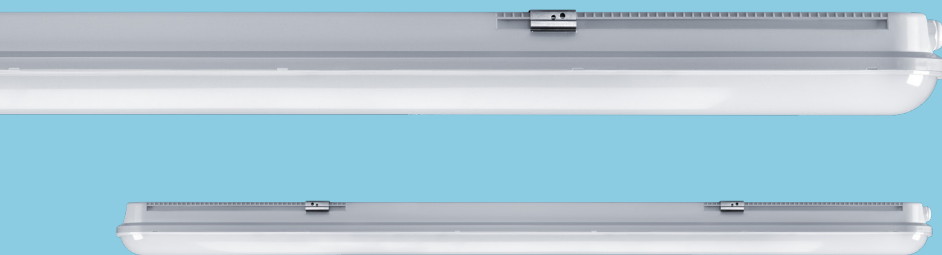

|                     | L    | W  | H  |
|---------------------|------|----|----|
| JULIE 600 LED IP65  | 635  | 94 | 76 |
| JULIE 1200 LED IP65 | 1235 | 94 | 76 |
| JULIE 1500 LED IP65 | 1535 | 94 | 76 |

## Specification

|                               |                               |
|-------------------------------|-------------------------------|
| Electrical class              | I                             |
| Ambient operating temperature | -20 to +40°C (E3: 0 to +25°C) |
| Driver                        | ENEC certified                |

## Material / Finish

|          |                                    |
|----------|------------------------------------|
| Canopy   | Polycarbonate                      |
| Diffuser | Opal polycarbonate (UV stabilised) |
| Bracket  | Stainless steel                    |

## Light source information

|                     |                                                                               |
|---------------------|-------------------------------------------------------------------------------|
| FLEX (Lumen switch) |                                                                               |
| 600mm               | 1000(8W), 1600 (12W), 2200lm (18W)                                            |
| 1200mm              | 2200 (18W), 3200 (25W), 4200lm (34W)                                          |
| 1500mm              | 4200 (33W), 5200 (41W) , 6300lm (51W)<br>4200 (33W) , 6300 (50W) 8600lm (72W) |
| Efficiency          | > 120lm/W                                                                     |
| Lifetime            | 50000 hours (@L70, Ta 25°C)                                                   |
| MacAdam (Initial)   | 4                                                                             |

## Controllability

|               |                                                 |
|---------------|-------------------------------------------------|
| Sensitivity   | 10%, 50%, 75%, 100%                             |
| Time          | 5s, 30s, 60s, 5min, 10min, 20min, 30min         |
| Lux           | 2lux, 10lux, 50lux, disable                     |
| Stand-by time | 0sec, 10sec, 1min, 10min, 30min, 60min, endless |
| Dimming level | 10%, 20%, 30%, 50%                              |

## Ordering guide

| Description                             | Cat No.          |
|-----------------------------------------|------------------|
| JULIE FLEX 1200 4200 840                | JU4200F4F        |
| JULIE FLEX 1200 4200 840 QC             | JU4200F4FQ       |
| JULIE FLEX 1200 4200 840 COR MWS        | JU4200FCM4F      |
| JULIE FLEX 1200 4200 840 DALI           | JU4200FX4F       |
| JULIE FLEX 1200 4200 840 TW             | JU4200F4FTW      |
| JULIE FLEX 1500 6300 840                | JU6300F5F        |
| JULIE FLEX 1500 6300 840 QC             | JU6300F5FQ       |
| JULIE FLEX 1500 6300 840 COR MWS        | JU6300FCM5F      |
| JULIE FLEX 1500 6300 840 DALI           | JU6300FX5F       |
| JULIE FLEX 1500 6300 840 TW             | JU6300F5FTW      |
| JULIE FLEX 1500 8600 840                | JU8600F5F        |
| JULIE FLEX 1500 8600 840 QC             | JU8600F5FQ       |
| JULIE FLEX 1500 8600 840 TW             | JU8600F5FTW      |
| JULIE FLEX 600 2200 840                 | JU2200F2F        |
| JULIE FLEX 600 2200 840 DALI            | JU2200FX2F       |
| JUST E3 LINEAR P&P KIT SelfTest LiFePo4 | ECOLINE3TLIFEKIT |
| JULIE FLEX SPAREMOUNT KIT               | JUFACCKIT        |

MWS: microwave presence sensor

COR: corridor function

TW: through-wired

QC: with quick connector

## Presence sensor with corridor function

Julie's microwave sensor option with corridor function will ensure that you never walk in the dark. The settings are fully adjustable, with the additional benefit of a daylight sensor. Option to connect several luminaires together onto one sensor, for simultaneous functionality.

## Sensor range

at 100% sensitivity

