


Lena

VARIO FLEX



Ideal for:
Circulation corridors, stairwells,
sanitary rooms and breakout areas

Bulkhead

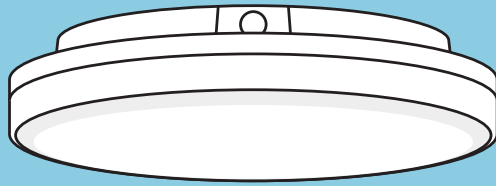

Slimline and adaptable, Lena lights up corridors with the highest flexibility



- **VARIO Feature (Colour Temperature Switch):** The ability to choose five different colour temperature on site with the flick of a switch
- **FLEX Feature (Lumen Output Switch):** The flexibility to decide on four lumen packages on site with the flick of a switch
- Modern slimline design
- Surface mount or semi-recessed mounting options
- Screwless, tamperproof design prevents vandalism by being visually free from access points
- UV proctected Polycarbonate
- **JUST** adapt on-site to an emergency version using the Just Emergency Plug&Play kit (available as an accessory)



Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C
Driver	ENEC certified

Installation / Mounting

Mounting	Wall and ceiling
Installation	Cable entry from back pre-knocked out, Standard surface, BESA, CONDUIT


Material / Finish

Body	Polycarbonate White
Diffuser	Polycarbonate Opal

Light source information

Colour temperature	3000 K, 3500 K, 4000 K, 5700 K, 6500 K	
Lumen	300mm	2400 lm (22 W), 1800 lm (16 W), 1200 lm (12 W), 800 lm (7 W)
	360mm	3500 lm (32 W), 3000 lm (27 W), 2400 lm (22 W), 1800 lm (16 W)
Efficiency	up to 123 lm/W	
Total emergency flux	300mm	191 lm
	360mm	167 lm
Lifetime	50 000 hours (@L80, Ta 25 °C)	
MacAdam (Initial)	<5	

Dimensions (mm)

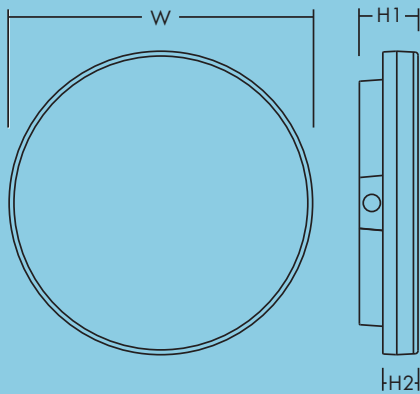

	W	H1	H2
LENA VF 300	300	58	36
LENA VF 360	360	58	36

Ordering guide

Description	SAP Code	Cat Number
LENA VF 300 2400 830/35/40/57/65	96637982	LN2400ZVF
LENA VF 300 2400 830/35/40/57/65 MWS	96638167	LN2400ZMVF
LENA VF 300 2400 830/35/40/57/65 MWSCOR	96637983	LN2400ZCMVF
LENA VF 360 3500 830/35/40/57/65	96637984	LN3500ZVF
LENA VF 360 3500 830/35/40/57/65 MWS	96638168	LN3500ZMVF
LENA VF 360 3500 830/35/40/57/65 MWSCOR	96637985	LN3500ZCMVF

Accessories

JUST E3/E3T CIR LIFEPO4 F1	96638038	ECOE3CIRLIFEKIT
----------------------------	----------	-----------------

MWS: microwave presence sensor

MWSCOR: microwave presence sensor with corridor function

Controllability (MWS) (default)


Sensitivity	100%, 75%, 50% , 25%, 10%
Time	30min, 20min, 3min , 90s, 30s, 5s
Lux	50Lux, 25Lux, 10Lux, 2Lux, Disable

Controllability (MWS COR) (default)

Sensitivity	100% / 50%
Time	5 s (testing) / 5 min / 15 min / 30 min
Stand by level	10%
Stand by time	0 s / 5 min / 15 min / never off
Daylight Sensor	OFF : MWS only
Mode	5 on / 7,5 off lux: external pedestrian walkway 100 on / 150 off lux: Internal Circulation Areas (corridors and stairs), Stockrooms and Storerooms 200 on / 300 off lux: Internal Washrooms, Toilets and Cloakrooms
Mode	Microwave Sensor + Daylight / Photocell only


Sensor range

at 100% sensitivity



MWS

	h1	d1	h2	d2
100%	4 m	10 m	8 m	8 m
50%	3 m	8 m	6 m	7 m



MWS COR

	h1	d1	h2	d2
100%	3 m	10 m	2 m	6 m
50%	3 m	6 m	2 m	3 m