

Mary

LED Garden Floodlight
with Earth Spike



Flexible and dynamic, Mary loves to communicate with others

- Reflector for a sharp, defined light beam
- Complete product with earth spike
- Compatible with THORNeco cable system
- Adaptor with open leads included
- High corrosion resistance (C4) and water ingress protection



Sealed to IP66 for exterior applications



IK08 rated impact resistance



50 000 hours lifetime



Connection cable with integrated waterstop



Compatible with THORNeco cable system


Ideal for...





Building facades



Gardens

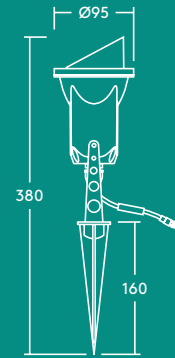

Lighting distribution



Mary 500lm

cd/klm ULOR: 100 %
DLOR: 0 %
LOR: 100 %

Light source information

- 500lm (8W), 62lm/W
- 3000K
- Lifetime: 50 000 hours rated life (@ L80, Ta 25°C)
- CRI 80

Specification

- Class I electrical
- IP66
- IK08
- Ambient operating temperature: -20 to +50°C

Installation/Mounting

- Earth spike included
- Pre-wired with mains cable and adaptor with open leads (1.5mm²)
- H07RN-F connection cable
- Salt resistant according to corrosion class C4

Material/Finish

Body: aluminium die-cast (RAL 9005)
Screws: stainless steel AISI 316 with GEOMET[®] 500 coating
Front cover: clear glass

Ordering guide

Description	Wt (kg)	SAP Code
MARY GARDEN SPOT IP66 500 830	0.75	96633583
Accessories:		
ECO PIR SENSOR	0.36	96633592
ECO PC SENSOR	0.36	96634061

Compatible THORNeco cable system

