


# Maya



Ideal for: office, school, library, shop

## Recessed LED Panel

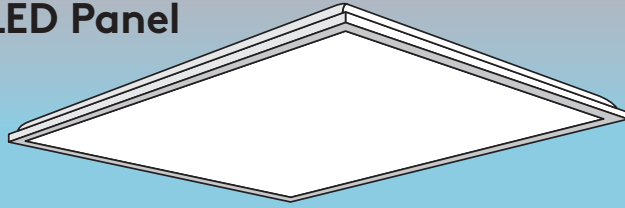

Providing homogenous, high-quality light with low glare, over a long lifetime. Maya recessed LED panel is the right choice for those who seek an affordable, simple solution for the refurbishment.



IP20



IK03

110

lm/W

50

000 hrs  
@L70



Guarantee




UGR <19




4000 K

- 1:1 replacement for traditional office luminaire
- Direct replacement for 4 x 14w T5 or 4x18w T8 fluorescent
- Gentle, soft and glare free lighting with UGR<19
- Easy and quick installation thanks to a connector box with a 4-pole piano-key connector (for up to 2.5mm<sup>2</sup> wires) enabling loop-in loop-out wiring
- Surface mounting is optional using the THORNeco Surface Mount Kit (separately available)
- Safety wire kit is available as optional extra
- Long lifetime L70 50 000 h
- Compatible with the PLUG&PLAY Emergency kit (separately available)

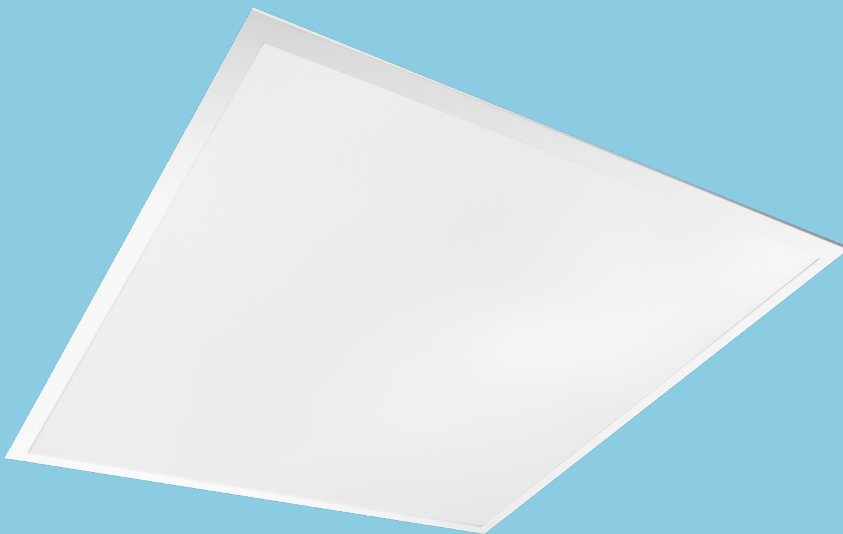

	L	W	H
MAYA	596	596	34

Dimensions (mm)



### Specification

Electrical class	II
Ambient operating temperature	-5 to +40 °C

### Installation / Mounting

Mounting	Safety wire (96637596 TECO MAYA Safety kit) available separately
Installation	Lay-in installation in T-bar ceiling grids – suitable for surface installation (accessories available separately)

### Material / Finish

Frame	Aluminium
Diffuser	PS
Backplate	Steel sheet

### Light source information

Colour temperature	4000 K
Lumen output	3500 lm (32 W)
Efficiency	up to 110 lm/W
Lifetime	50 000 hours (@L70, Ta 25 °C)
MacAdam (Initial)	5

### Ordering guide

Description	SAP Code Cat Number
MAYA Q596 3500 840	96637595 MY3500Z4K6X6

#### Accessories

TECO MAYA SAFETY KIT	96637596 MYSAFEKIT
TECO SURFACE MOUNT BOX Q596	96635585 ECOSURBOX
JUST E3 PLUG&PLAY KIT MANUAL TEST LiFePO4	96635766 ECOE3MLIFEKIT