


# Poppy

LED Batten

FLEX



Ideal for: Corridors, Workshops, Warehouses & Secondary Rooms

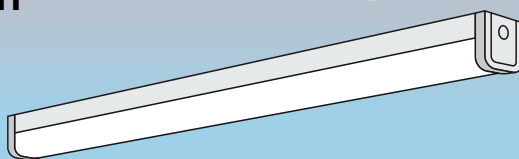

Tactful and timeless, Poppy blends into a wide range of indoor settings.




IP40



IK08



- FLEX Feature (Lumen Output Switch): The flexibility to decide on your lumen package on site with the flick of a switch
- Easy to install IP40 batten
- Direct replacement for conventional battens in terms of light performance and length
- The innovative design protected endcap provides a unique tool free locking mechanism that guards fitting against unauthorised access
- Locking mechanism easy to open with correct tools for maintenance
- JUST: adapt on-site to an emergency version using the Just Emergency Linear PLUG&PLAY kit (with self test manual test option)
- High visual comfort light emitting surface
- Cable entry from back or side
- Push terminal for loop-in/out wiring
- Wide fitting reducing the possibility of repainting after installation
- BESA compatible



	L	W	H
POPPY FLEX 1200	1204	71	81
POPPY FLEX 1500	1504	71	81
POPPY FLEX 1800	1766	71	81

Dimensions (mm)

## Specification

Electrical class	I
Ambient operating temperature	-20 to +40°C
Driver	ENEC

## Installation / Mounting

Mounting	Surface mount
Installation	Tool free

## Material / Finish

Body	Sheet metal, white finish (RAL 9002)
Diffuser	Polycarbonate, Opal UV stabilized
End caps	Polycarbonate, White (RAL 9002) UV stabilized

## Light source information

Colour temperature	4000 K
Flex Lumen Switch	1200mm: 2600lm (19W), 3800lm (29W), 5000lm (38W) 1500mm: 3500lm (26W), 5000lm (39W), 6500lm (52W) 1800mm: 4400lm (31W), 6500lm (47W), 8500lm (64W)
Efficiency	up to 142 lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	< 5

## Ordering guide

Description	SAP Code	CAT Number
POPPY FLEX 1200 5000 840	96637592	PO5000F4F
POPPY FLEX 1500 6500 840	96637593	PO6500F5F
POPPY FLEX 1800 8500 840	96637594	PO8500F6F
JUST E3 LINEAR P&P KIT SELFTTEST LIFEPO4	96700027	ECOLINE3TLIFEKIT