


# Sylvie

## Fire-Rated Downlight

VARIO



Ideal for: Residential and small business: corridors, passages, indoor circulation areas.

Sleek, fire rated and flexible. Sylvie is ideal for many situations.



IP  $\frac{20}{65}$



60°

50

000 hrs @L70



68 mm



Guarantee



Dimmable




3000 K  
3500 K  
4000 K



90/60/30

- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature on site with the flick of a switch
- 90/60/30 min fire-rated downlight
- Direct replacement of 35W halogen fire-rated downlights
- Integrated design of the housing includes driver and connection unit with an IP65 rating from below
- Product height of only 64 mm: fits various ceiling types
- Can be covered with insulation material
- Strain relief integrated into the connector unit to prevent installation errors
- Safe and quick push-in connection with loop-in loop-out
- Suitable for use with phase-cut dimmer switches, trailing and leading-edge dimmers
- Supplied with a white trim (Brushed Nickel metal trim available as optional extra)

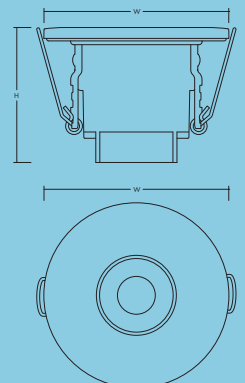

|        | W  | H  |
|--------|----|----|
| SYLVIE | 88 | 64 |

Dimensions (mm)

### Specification

|                               |                                       |
|-------------------------------|---------------------------------------|
| Electrical class              | II                                    |
| Ambient operating temperature | -10 to +40 °C                         |
| IP                            | IP65 (room side)<br>IP20 (from above) |
| IK                            | 03                                    |
| Driver                        | Integrated, dimmable                  |

### Installation / Mounting

|              |  |
|--------------|--|
| Mounting     | Recessed installation into ceilings with 3 - 35 mm sickness<br>6-pole push-in connector, 6x1.5 mm <sup>2</sup> , enabling loop-in loop-out |
| Installation | Cutout Ø 68 mm   |

### Material / Finish

|            |   |
|------------|---|
| Body       | Aluminium, PC                                     |
| Diffuser   | PC  |
| Bezel trim | ABS (supplied by default);<br>aluminium as option |

### Light source information

|                           |                               |
|---------------------------|-------------------------------|
| Colour temperature switch | VARIO 3000 - 3500 - 4000K     |
| Lumen output              | 550lm (6W)                    |
| Beam angle                | 60°                           |
| Efficiency                | up to 95 lm/W                 |
| Lifetime                  | 50 000 hours (@L70, Ta 25 °C) |
| MacAdam (Initial)         | 5                             |

### Controllability

|               |            |
|---------------|------------|
| Dimming Level | 10 - 100 % |
|---------------|------------|

### Ordering guide

| Description                   | SAP Code |
|-------------------------------|----------|
| SYLVIE VARIO 68 550 830/35/40 | 96637641 |
| <b>Accessories</b>            |          |
| TECO SYLVIE TRIM NIC          | 96637642 |