


Sylvie

Fire-Rated Downlight

VARIO



Ideal for: Residential and small business: corridors, passages, indoor circulation areas.

Sleek, fire rated and flexible. Sylvie is ideal for many situations.



IP $\frac{20}{65}$



60°

50

000 hrs
@L70



68 mm



Guarantee



Dimmable




3000 K
3500 K
4000 K



90/60/30

- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature on site with the flick of a switch
- 90/60/30 min fire-rated downlight
- Direct replacement of 35W halogen fire-rated downlights
- Integrated design of the housing includes driver and connection unit with an IP65 rating from below
- Product height of only 64 mm: fits various ceiling types
- Can be covered with insulation material
- Strain relief integrated into the connector unit to prevent installation errors
- Safe and quick push-in connection with loop-in loop-out
- Suitable for use with phase-cut dimmer switches. trailing and leading-edge dimmers
- Supplied with a white trim (Brushed Nickel metal trim available as optional extra)

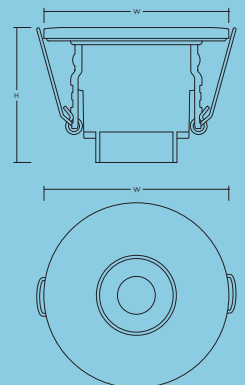

| | W | H |
|--------|----|----|
| SYLVIE | 88 | 64 |

Dimensions (mm)

Specification

| | |
|-------------------------------|---------------------------------------|
| Electrical class | II |
| Ambient operating temperature | -10 to +40 °C |
| IP | IP65 (room side) IP20 (from above) |
| IK | 03 |
| Driver | Integrated, dimmable |

Installation / Mounting

| | |
|--------------|---|
| Mounting | Recessed installation into ceilings with 3 - 35 mm thickness 6-pole push-in connector, 6x1.5 mm ² , enabling loop-in loop-out |
| Installation | Cutout Ø 68 mm |

Material / Finish

| | |
|------------|---|
| Body | Aluminium, PC |
| Diffuser | PC |
| Bezel trim | ABS (supplied by default); aluminium as option |

Light source information

| | |
|---------------------------|-------------------------------|
| Colour temperature switch | VARIO 3000 - 3500 - 4000K |
| Lumen output | 550lm (6W) |
| Beam angle | 60° |
| Efficiency | up to 95 lm/W |
| Lifetime | 50 000 hours (@L70, Ta 25 °C) |
| MacAdam (Initial) | 5 |

Controllability

| | |
|---------------|------------|
| Dimming Level | 10 - 100 % |
|---------------|------------|

Ordering guide

| Description | SAP Code | Cat Number |
|-------------------------------|----------|------------|
| SYLVIE VARIO 68 550 830/35/40 | 96637641 | SY550ZVK |
| Accessories | | |
| TECO SYLVIE TRIM NIC | 96637642 | SYTRMNIC |