


Tom

IP66 Bulkhead

VARIO FLEX


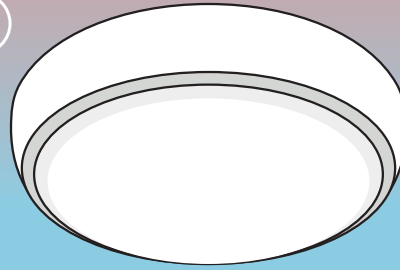


Ideal for: Circulation corridors, public entrance areas, stairwells, sanitary rooms and underpasses

Comfortable, flexible and variable both indoors and out




- VARIO Feature (Colour Temperature Switch): The ability to choose five different colour temperature on site with the flick of a switch
- FLEX Feature (Lumen Output Switch): The flexibility to decide on four lumen packages on site with the flick of a switch
- Screwless, tamperproof design prevents vandalism by being visually free from access points
- Robust construction up to IK10 impact resistance
- Centred cable entry points makes it easier to install on a level
- Maximise energy savings using microwave sensor and corridor function (available as options)
- Replaceable light engine and driver extend the life of the product
- JUST – adapt on-site to an emergency version using the Just Emergency Plug&Play kit

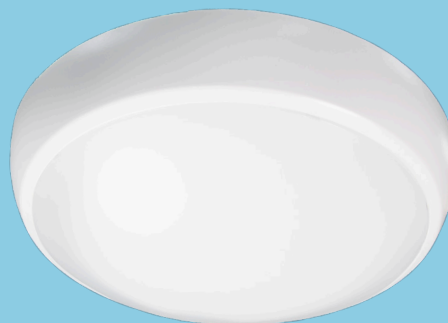

	Ø	H
TOM	313	79

Dimensions (mm)



Specification

Electrical class	II
Ambient operating temperature	-20°C - +40°C
Driver	ENEC

Installation / Mounting

Mounting	Wall, Ceiling, Interior, Outdoor
Installation	Tool free

Material / Finish

Body	UV Stabilised PC
Diffuser	UV Stabilised PC

Light source information


VARIO (Colour temperature switch)	3000K, 3500K, 4000K , 5700K, 6500K
FLEX (Lumen switch)	800lm, 1200lm, 1800lm, 2200lm
Efficiency	110lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	<5

Controllability (MWS) (default)

Sensitivity	100%, 75%, 50% , 25%, 10%
Time	30min, 20min, 3min , 90s, 30s, 5s
Switching Load	400W
Lux	50Lux, 25Lux, 10Lux, 2Lux, Disable

Sensor range

at 100% sensitivity

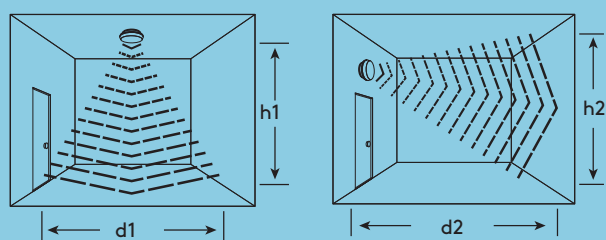

	h1	d1	h2	d2
100%	4 m	10 m	8 m	8 m
50%	3 m	8 m	6 m	7 m

Ordering guide

Description	Cat Number
TOM VF 2200 830/35/40/57/65 WH	TM2200ZVF
TOM VF 2200 830/35/40/57/65 WH MWS	TM2200ZMVF
TOM VF 2200 830/35/40/57/65 WH MWSCOR	TM2200ZCMVF

Accessories

JUST E3/E3T CIR LiFePO4 F1	ECO3CIRLIFEKIT
DRV TE TOM VF/LARA VF2 V1*	ECOSDRVTM/LA
DRV TE TOM VF/LARA VF2 MWSCOR V1**	ECOSDRVTM/LACM
LE TE TOM VF/LARA VF2 V1	ECOSPLETM/LA

MWS: microwave presence sensor

MWSCOR: microwave presence sensor with corridor function

DRV: spare driver

LE: light engine

WH: white

* suitable for use with 96637988 & 96638989


** suitable for use with 96637990

Controllability (MWS COR) (default)

Sensitivity	100% / 50%
Time	5s (testing) / 5min / 15min / 30min
Stand by level	10%
Stand by time	0s / 5min / 15min / never off
Daylight Sensor	OFF: MWS only
	5 on / 7,5 off lux: external pedestrian walkway
	100 on / 150 off lux: Internal Circulation Areas (corridors and stairs), Stockrooms and Storerooms
	200 on / 300 off lux: Internal Washrooms, Toilets and Cloakrooms
Mode	Microwave Sensor + Daylight / Photocell only

Sensor range

at 100% sensitivity

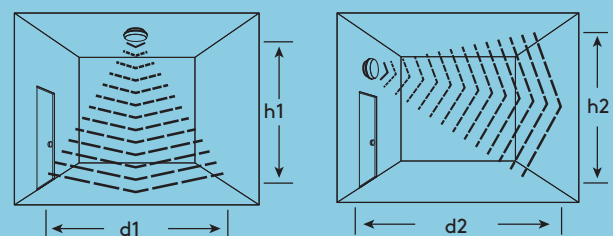

	h1	d1	h2	d2
100%	3 m	10 m	2 m	6 m
50%	3 m	6 m	2 m	3 m