


Zoe

VARIO FLEX

Slim LED Downlight

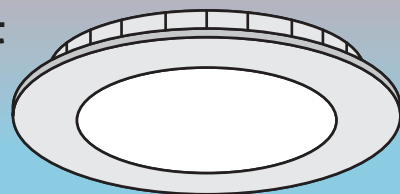


Ideal for: Circulation corridors, reception areas, schools/universities and office/meeting rooms

Slim, flexible and comfortable, Zoe is ideal for your everyday needs.




- **VARIO Feature (Colour Temperature Switch):** The ability to choose your colour temperature on site with the flick of a switch
- **FLEX Feature (Lumen Output Switch):** The flexibility to decide on your lumen package on site with the flick of a switch
- Prismatic diffuser improves perceived glare
- The slimline profile of 27 mm fits most ceiling types

- Easy, quick and tool-free installation thanks to an integrated connector with a 4-pole push terminal (for up to 2.5 mm² wires) enabling loop-in loop-out wiring
- The 200 mm version with DALI driver allows for complete dimmability
- **JUST:** adapt on-site to an emergency version using the Just Emergency PLUG&PLAY kit

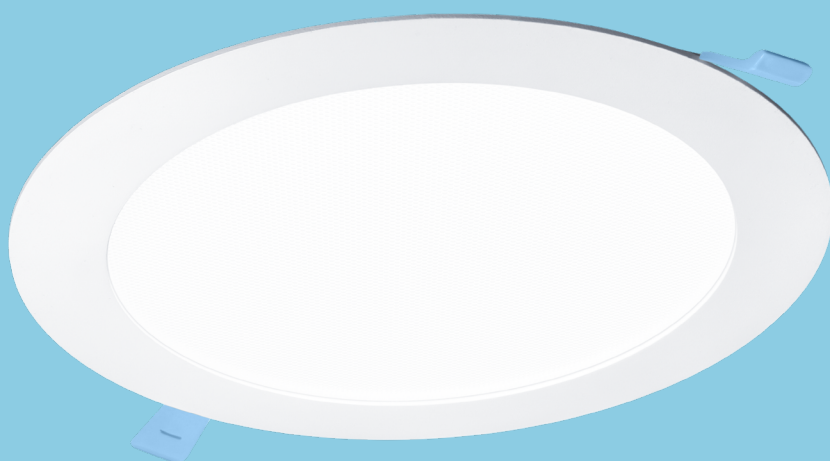

	Ø	W	H1
ZOE 130	130-135	146	27
ZOE 165	165-170	181	27
ZOE 200	205-210	221	27
Dimensions (mm)			



Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C (E3: 0 to +40 °C)
IP	IP44 (from below), IP20 (from above)
Driver	ENEC certified
DALI	DALI-2 and Switch DIM

Installation / Mounting

Mounting	Recessed installation into a wide range of ceiling types Connector for tool-free wiring, also enabling loop-in loop-out Surface mounting option for Zoe 200 Can be covered with insulation material
----------	--

Material / Finish

Body	Back plate: Steel Frame:Aluminium, white finish
Diffuser	Prismatic PC
Light Guide Panel	PMMA

Light source information

VARIO (Colour temperature switch)	3000K, 3500K & 4000K
FLEX (Lumen switch)	130mm 330lm(3W) 550lm(5W) 700lm(6.5W) 165mm 650lm(6W) 850lm(8W) 1000lm(9.5W) 200mm 1200lm(11W) 1600lm(15W) 2000lm(19W)
Efficiency	up to 110 lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	4

Controllability (DALI-2)

Dimming level	1-100%
---------------	--------

VARIO and FLEX feature

There is no need to worry about lumen packages or colour temperatures anymore – it's always the same product and the adaption to your application can be done directly on site:



Colour temperature switch



Lumen output switch

Ordering guide

Description	SAP Code	Cat Number
ZOE VARIOFLEX 130 700 830/35/40	96637118	ZO700ZVF
ZOE VARIOFLEX 165 1000 830/35/40	96637119	ZO1000ZVF
ZOE VARIOFLEX 200 2000 830/35/40	96637120	ZO2000ZVF
DALI		
ZOE VARIO 200 2000 830/835/840 DALI	96637643	ZO2000XV
Accessories		
ZOE VARIO 210 SURFACE MOUNT BOX	96635258	ZOSURBOX
Just E3 PLUG&PLAY Kit ManualTest LiFePO4	96635766	ECO3MLIFEKIT
Just E3 Plug&Play Kit SelfTest LiFePo4	96634428	ECO3TLIFEKIT
REPLACEMENT BATTERY FOR 96634428	59011337	ECO3TLIFEBAT