


## LED ceiling-recessed luminaire

Uniform light surface. Product height of only 12 mm: fits various ceiling types. Replaces conventional downlights with 2 x 18 W CFL and offers up to 50 % energy saving. External connector box for easy and quick installation. E3 emergency kit available as accessory.


Body: Aluminum, white finish (RAL9003)

Diffuser: Polystyrol

Weight: 0.48 kg

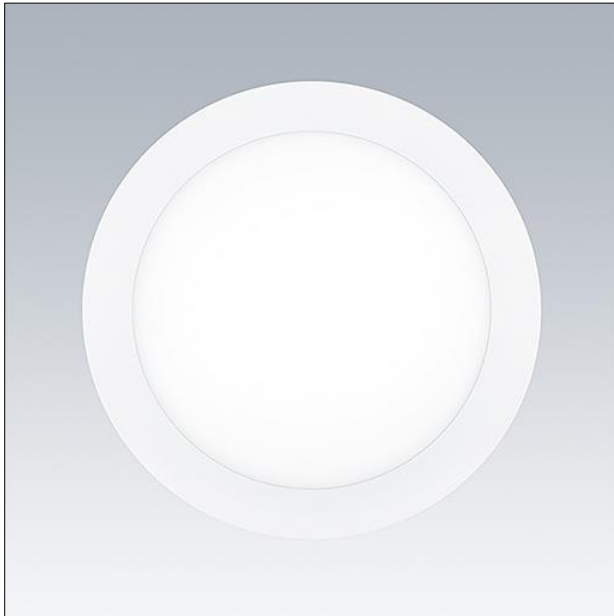


TE\_ZOE\_F\_220.jpg

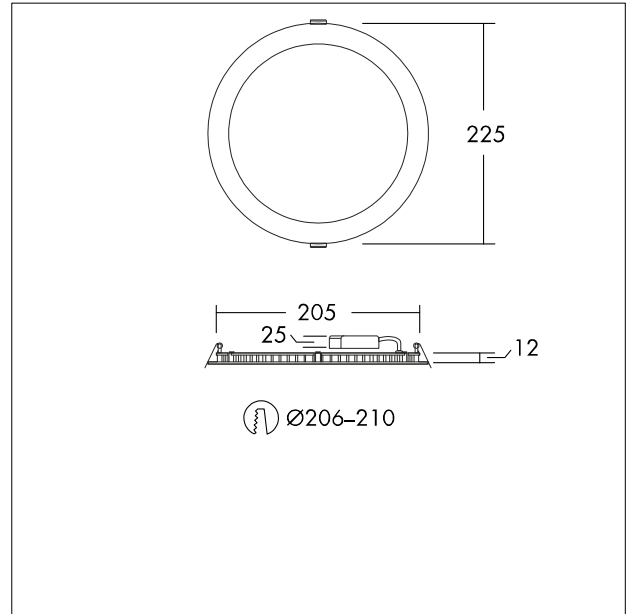

TE\_ZOEL\_M\_225mm.wmf

## Light Distribution

## STD - standard

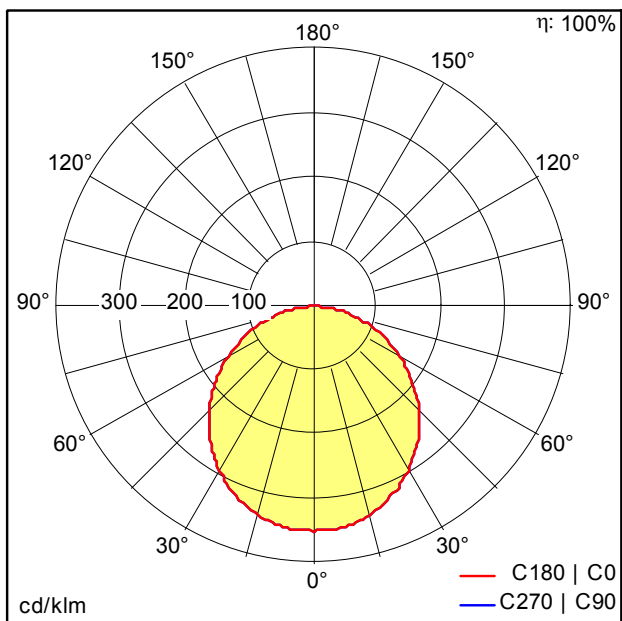

TE\_ZOE\_LED\_DL\_210\_1500\_840.lct

- Light Source: LED
- Luminaire luminous flux\*: 1500 lm
- Luminaire efficacy\*: 83 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature\*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam)\*: 4
- Rated median useful life\*: 35000h L70 at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 18 W Power factor = 0.9
- Dimming: Fixed output