



LED ceiling-recessed luminaire

Uniform light surface. Product height of only 12 mm: fits various ceiling types. Replaces conventional downlights with 1 x 18 W CFL and offers up to 50 % energy saving. External connector box for easy and quick installation. E3 emergency kit available as accessory.  
 Body: Aluminum, white finish (RAL9003)  
 Diffuser: Polystyrol  
 Weight: 0.20 kg

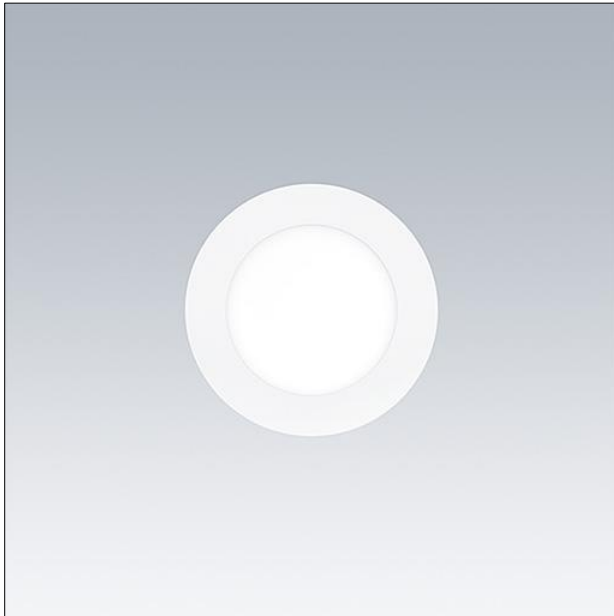


TE\_ZOE\_F\_120.jpg

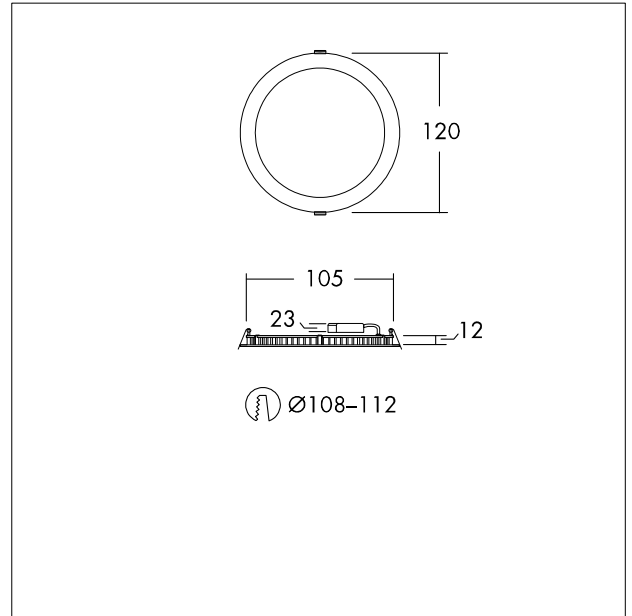

TE\_ZOEL\_M\_120mm.wmf

Light Distribution

STD - standard

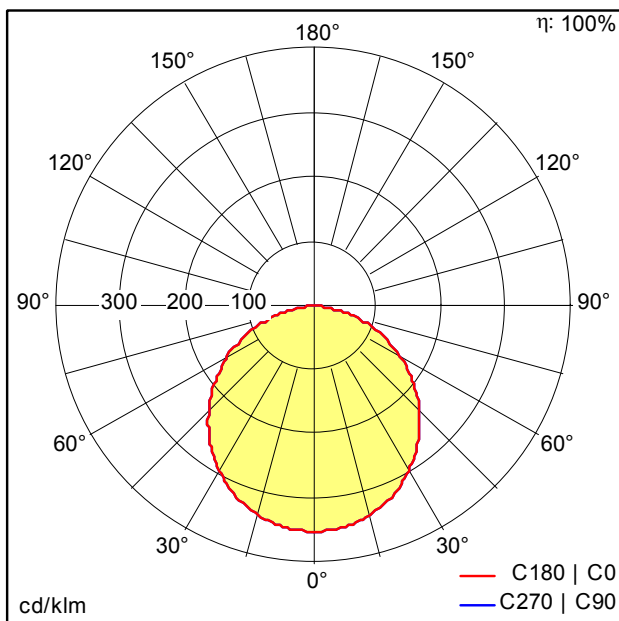

TE\_ZOE\_LED\_DL\_110\_600\_830.ltd

- Light Source: LED
- Luminaire luminous flux\*: 551 lm
- Luminaire efficacy\*: 69 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature\*: 3000 Kelvin
- Chromaticity tolerance (initial MacAdam)\*: 4
- Rated median useful life\*: 35000h L70 at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 8 W Power factor = 0.7
- Dimming: Fixed output