

## Wall mounted luminaire

Circular IP65 bulkhead with optional trim accessories. Direct replacement for 1x28W 2D. More than 50% energy savings compared with luminaires with CFL lamps. Frosted diffuser ensuring homogeneous light effect and visual comfort. Sealed to IP65 for protected exterior applications. Robust construction tested up to IK08 impact resistance. 3 hour emergency lighting.


Body: Polycarbonate, black (RAL 9011)

Diffuser: Polycarbonate, opal

Weight: 1.24 kg




TE\_LARA\_F\_300\_BLANK\_BL\_persp.jpg

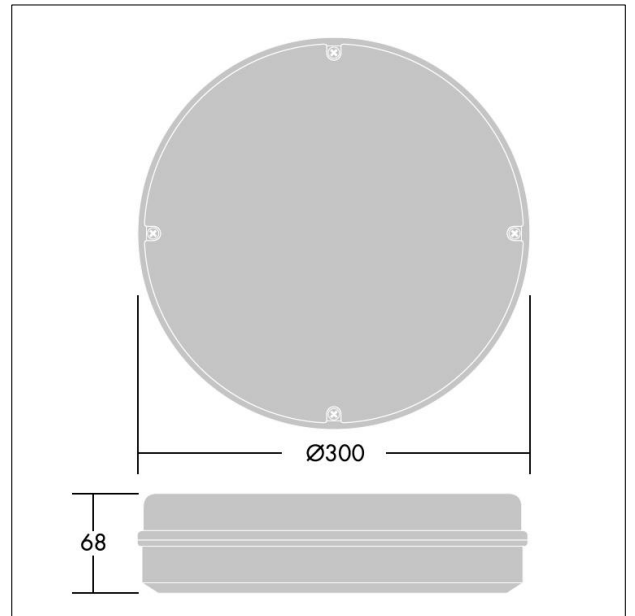

TE\_LARA\_M\_1200L.wmf

## Light Distribution

## Emergency

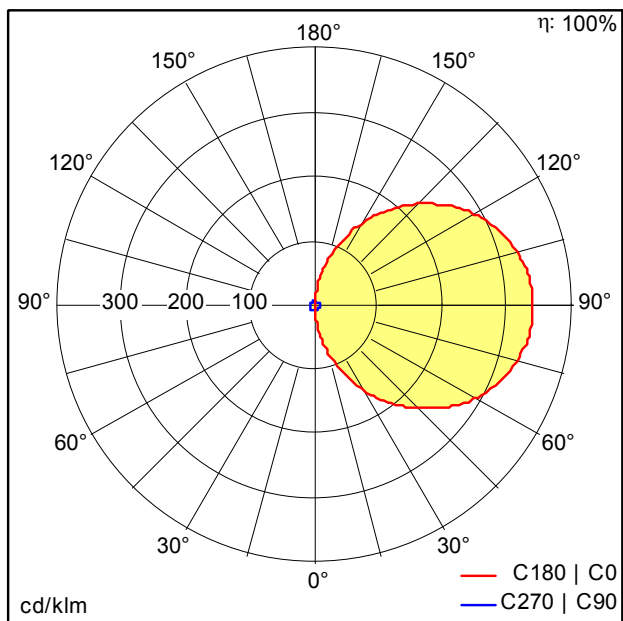

TE\_LARA\_LED\_300\_1200\_840\_BLK\_E3e.ltd

- Light Source: LED
- Luminaire luminous flux\*: 165 lm
- Luminaire efficacy\*: 82 lm/W
- Colour Rendering Index min.: 80
- Chromaticity tolerance (initial MacAdam)\*: 4
- Rated median useful life\*: 50000h L70 at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 2 W
- Dimming: Fixed output