

LED Floodlight

Very lightweight, compact and streamline design. Universal mounting bracket allows wall or surface mounting with the possibility of tilting upwards or downwards. Pre-wired with 30 cm long mains cable and open cable ends with 1mm² cross section.


Glass: Tempered glass

Reflector: Aluminium


Cover: Aluminum die-cast

Mounting bracket: Aluminum die-cast

Weight: 0.85 kg

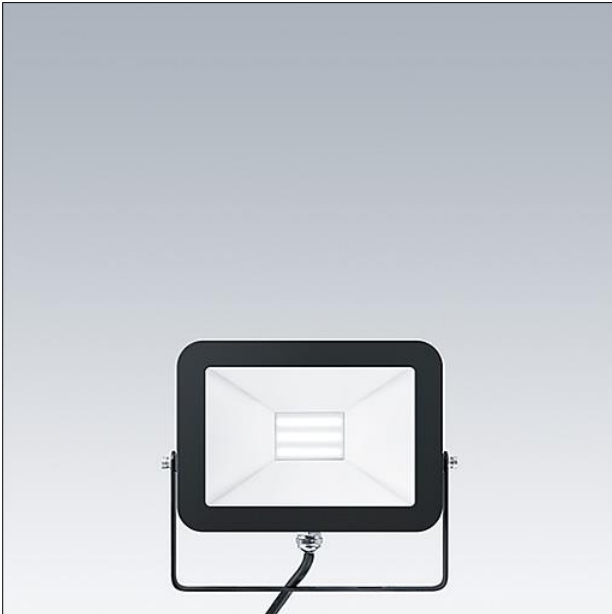


TE_ALICE_F_180.jpg

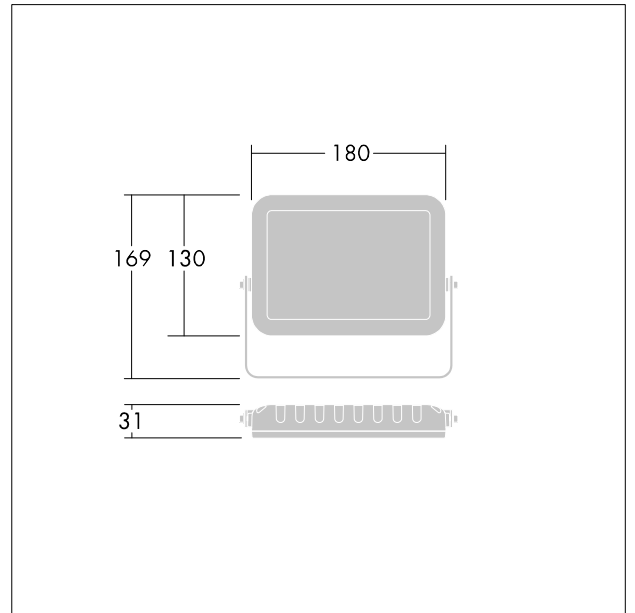

TE_ALIC_M_30W_LD.wmf

Light Distribution

STD - standard

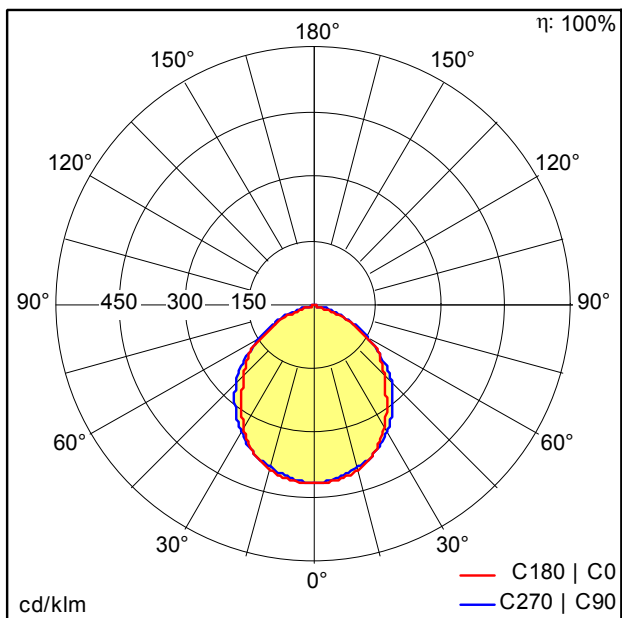

TE_ALICE_LED_FL_IP65_20W_840.idt

- Light Source: LED
- Luminaire luminous flux*: 1602 lm
- Luminaire efficacy*: 80 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam)*: 6
- Rated median useful life*: 35000h L70 at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 20 W Power factor = 0.5
- Dimming: Fixed output