

Moisture-proof diffuser luminaire


An IP65 rated LED luminaire for high quality low energy lighting in wet, dusty environments. High quality opal polycarbonate (UV stabilised) diffuser ensures uniform lighting without visible spots. High efficacy, up to 60% energy saving compared with T8 fluorescent. The traditional design gives an aesthetically pleasing appearance – ideal for point for point replacement on refurbishment projects. 3h emergency light.

Body: polycarbonate


Diffuser: opal polycarbonate (UV stabilised)

Brackets: stainless steel

Weight: 2,6 kg

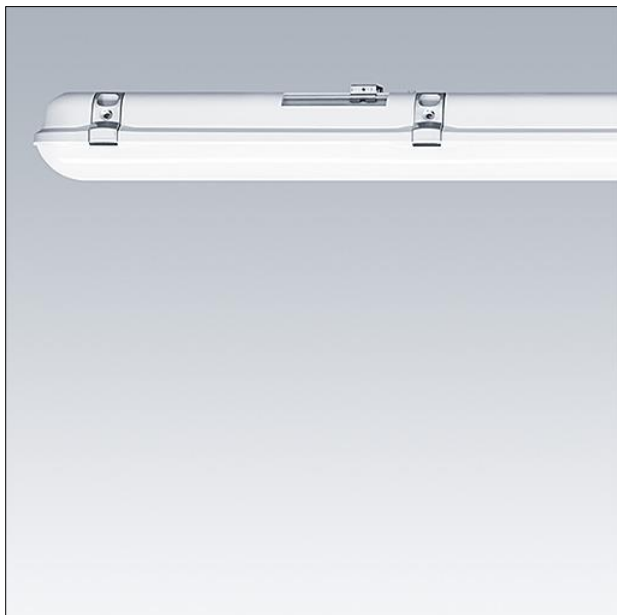

TE_JULIE_F_side.jpg

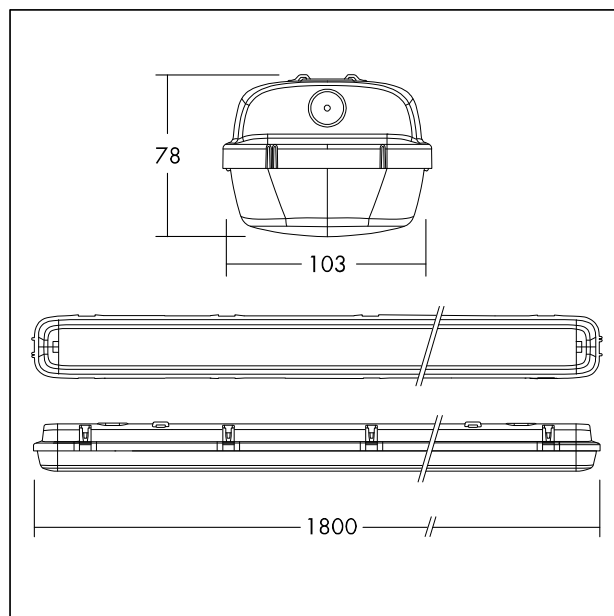

TE_JULIE_M_IID2_1800.wmf

Light Distribution

Emergency

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

IEC EN
60598-1
RG 0

RoHS

UK
CA

IP65

IK08

CE

850°C

Ta 0

+25