

Emergency LED driver

Emergency LED driver and NiMH battery for 3 hour emergency duration, including indicator LED. Enables quick and easy conversion of general lighting for emergency operation. Compatible with Zoe slim downlights. The NiMH battery incorporates SmartCharge™ technology consisting of an intermittent charge duty cycle when in charge maintenance mode. This provides energy efficient charging, reduced operating temperatures and optimum service life of the battery. Manufactured by Mackwell in UK.

Rated supply voltage: 230V

Supply frequency: 50/60Hz

Supply current (Max): 25mA

Power factor: 0.5 - 0.7

LED voltage (Vf): 6 to 55V

Ambient temperature (ta): 0°C to +35°C

Maximum case temperature (tc): +70°C

Rated emergency duration: 3 hours


Battery charge current NiMH (4Ah): 200mA*

Initial charge period: 24 hours

Weight : 0,42 kg



TE_EMERGENCY_F_just_emergency.jpg

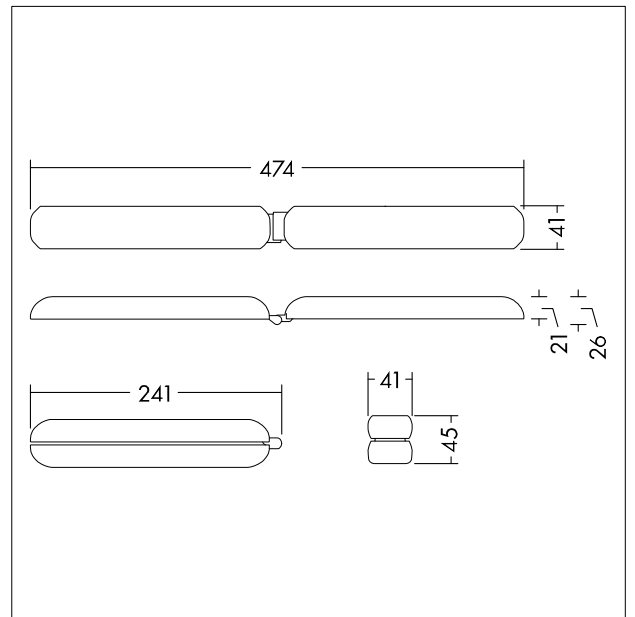

TE_ACC_M_E3_Kit.wmf

Light Distribution

STD - standard