

## Spotlight module

850 lm LILY light engine with a 24° beam angle and Colour rendering Ra > 90, colour temperature 2700 K. Complete with connector and driver.

Material: die-cast aluminium, black


Weight: 0.27 kg



TE\_LILY\_F\_persp.jpg

## Light Distribution

STD - standard

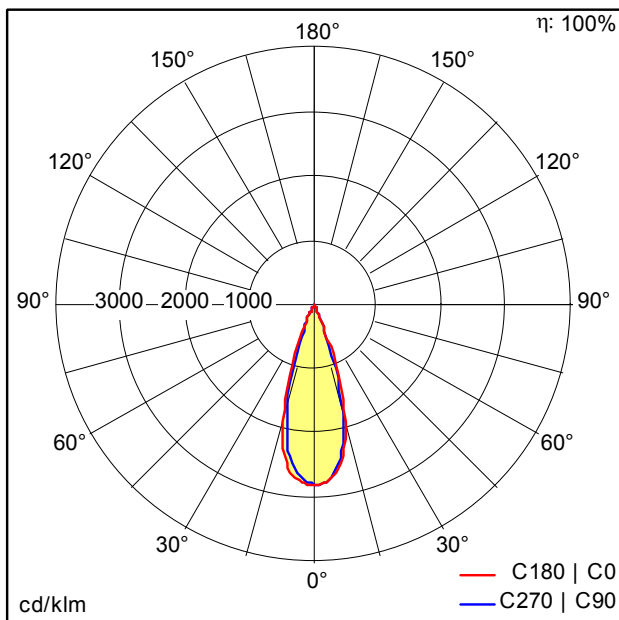

TE\_LILY\_LED\_SPOT\_IP44\_24\_68\_850\_927.idt

- Light Source: LED
- Luminaire luminous flux\*: 900 lm
- Luminaire efficacy\*: 100 lm/W
- Colour Rendering Index min.: 90
- Correlated colour temperature: 2700 Kelvin
- Chromaticity tolerance (initial MacAdam): 3
- Rated median useful life\*: L80 50000h at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 9 W Power factor = 0.9
- Dimming: PCDCG dimmable to 10%

All values marked with an \* are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.