

Spotlight module

600 lm LILY light engine with a 60° beam angle and Colour rendering Ra > 90, colour temperature 4000 K. Complete with connector and driver.

Material: die-cast aluminium, black


Weight: 0.27 kg



TE_LILY_F_persp.jpg

Light Distribution

STD - standard

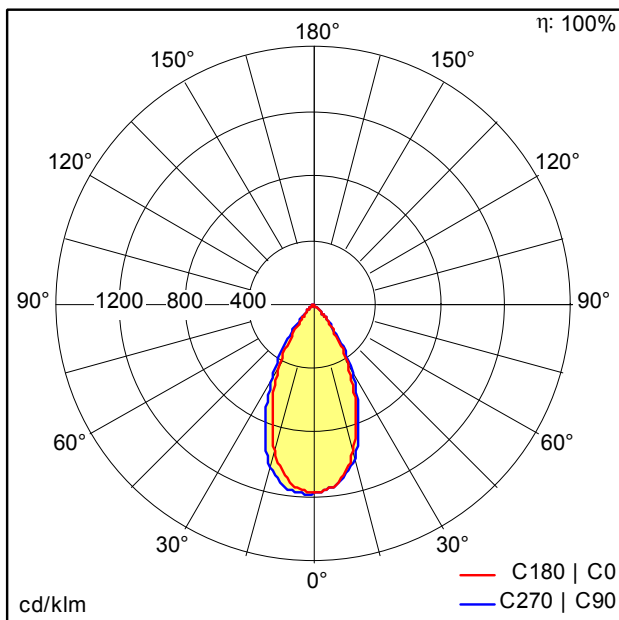

TE_LILY_LED_SPOT_IP44_60_68_600_940.idt

- Light Source: LED
- Luminaire luminous flux*: 600 lm
- Luminaire efficacy*: 100 lm/W
- Colour Rendering Index min.: 90
- Correlated colour temperature: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 3
- Rated median useful life*:
L80 50000h at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 6 W Power factor = 0.9
- Dimming: PCDCG dimmable to 10%

All values marked with an * are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.