

Lara

Circular IP65 bulkhead



Meet Lara

Sporting many different looks, Lara is the ultimate choice for a range of indoor and outdoor settings

- 1200 lm LED (direct replacement for 1×28 W 2D) and 800 lm LED (direct replacement for 1×16 W 2D)
- Frosted diffuser ensures a homogeneous light effect and visual comfort
- Sealed to IP65 for protected exterior applications
- Robust construction tested up to IK08 impact resistance
- Optional trim accessories in 4 designs: bezel, eyelid, eyelid grille and grille
- 2 Colours: white (RAL 9003) and black (RAL 9011)
- Optional: Integral photocell or microwave presence sensor maximising the energy saving potential



1200 and 800 lumens, up to 90 lm/W



50 000 hours lifetime



Save up to 70% energy compared with luminaires with 2D lamps



300 and 250 mm diameter



3h emergency version available



Integral photocell or presence sensor

Ideal for...



Circulation Corridors



Public entrance areas




Underpasses



Stairwells

Light source information

- 1200 lm (13 W), 90 lm/W and 800 lm (10 W), 80 lm/W
- 4000 K neutral white LED
- Lifetime 50 000 hours (@L70B50, Ta 25 °C)
- CRI 80

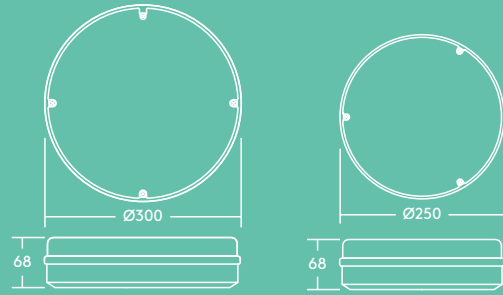


Bezel trim BLK Bezel trim WH Eyelid trim Eyelid grille trim Grille trim

Lighting distribution

Lara 1200 lm

cd/klm ULOR: 50% DLOR: 50% LOR: 100%



Installation/Mounting

- Suitable for wall or ceiling mounting
- Quick and easy installation
- Suitable for BESA fixing

Material/Finish

Body: Polycarbonate
Diffuser: Polycarbonate

Integral photocell & presence sensor

Lara's integral photocell option will light from dusk till dawn. (Operation level: approx. 20 lux ON, approx. 30 lux OFF).

Lara's microwave sensor option will ensure that light is only delivered when needed. The motion detection range and time duration is fully adjustable, with the additional benefit of a daylight sensor for illuminance levels between 2 and 50 lux.

Ordering guide

Description	Wt (kg)	SAP Code
LARA LED 250 800 840 WH	0.7	96666101
LARA LED 250 800 840 BLK	0.7	96666102
LARA LED 250 800 840 WH E3	0.9	96666103
LARA LED 250 800 840 BLK E3	0.9	96666104
LARA LED 300 1200 840 WH	1.1	96666105
LARA LED 300 1200 840 BLK	1.1	96666106
LARA LED 300 1200 840 WH E3	1.2	96666107
LARA LED 300 1200 840 BLK E3	1.2	96666108
LARA LED 300 1000 840 BEZEL TRIM WH	1.3	96628900
LARA LED 250 800 840 MWS WH	0.7	96666109
LARA LED 250 800 840 MWS BLK	0.7	96666110
LARA LED 250 800 840 MWS WH E3	0.9	96666111
LARA LED 250 800 840 MWS BLK E3	0.9	96666112
LARA LED 300 1200 840 MWS WH	1.1	96666113
LARA LED 300 1200 840 MWS BLK	1.1	96666114
LARA LED 300 1200 840 MWS WH E3	1.2	96666115
LARA LED 300 1200 840 MWS BLK E3	1.2	96666116
LARA LED 250 800 840 PC WH	0.7	96666117
LARA LED 250 800 840 PC BLK	0.7	96666118
LARA LED 300 1200 840 PC BLK	1.1	96666119
LARA LED 300 1200 840 PC WH	1.1	96666120
Accessories		
LARA BEZEL TRIM SMALL 250 WH	0.2	96666121
LARA BEZEL TRIM LARGE 300 WH	0.2	96666122
LARA BEZEL TRIM SMALL 250 BLK	0.2	96666123
LARA BEZEL TRIM LARGE 300 BLK	0.2	96666124
LARA EYELID TRIM SMALL 250 BLK	0.2	96666125
LARA EYELID TRIM LARGE 300 BLK	0.3	96666126
LARA EYELID GRILLE TRIM SMALL 250 BLK	0.2	96666127
LARA EYELID GRILLE TRIM LARGE 300 BLK	0.3	96666128
LARA GRILLE TRIM SMALL 250 BLK	0.2	96666129
LARA GRILLE TRIM LARGE 300 BLK	0.3	96666130
LARA Tamperproof Screw Kit		96628612

MWS: Microwave presence sensor

BLK: black; WH: white

E3: 3 hour emergency

lighting

PC: Photocell